


**Description**

Fastener Length: 1/4", 1204-03 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	12040306
Minimum Qty (MOQ):	100
NSN:	5320-00-714-7493
Schedule B:	7318.23.0000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

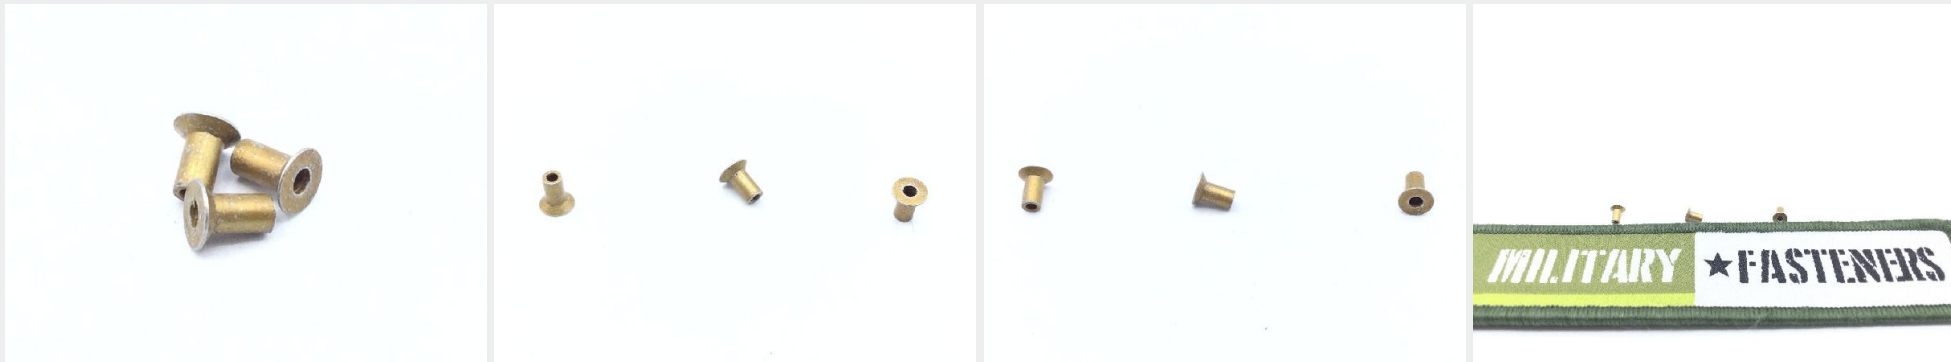

\* See page 2 for technical characteristics

## P/N 1204-0306 Specifications

<b>Fastener Length:</b>	0.183 Inches Minimum And 0.193 Inches Maximum
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.095 Inches Minimum And 0.097 Inches Maximum
<b>Shank Style:</b>	Pull Through Hollow Shank
<b>Head Major Diameter:</b>	0.178 Inches Minimum And 0.186 Inches Maximum
<b>Expansion Device:</b>	Knob Stem-type K
<b>Grip Length:</b>	0.063 Inches Minimum And 0.125 Inches Maximum
<b>Countersink Angle:</b>	100.0 Degrees Nominal
<b>Material:</b>	Steel Comp 1012 Overall
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416 Ty 2 Cl 2 Fed Spec Single Treatment Response Overall

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/1204-0306> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.