

Description

Single Pole Single Throw (SPST) 2 Position (Off and On), Screw Terminals, Standard Lever, Honeywell, 1TL1 series switch


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[MS24523-22](#)

| | |
|-------------------------|--------------------------------------|
| SKU / Model: | 1TL12 |
| Minimum Qty (MOQ): | 1 |
| NSN: | 5930-00-683-1628 |
| Schedule B: | 8535.30.0080 |
| ECCN: | EAR99 |
| National Motor Freight: | 061300, Circuit Breaker / Switch Noi |

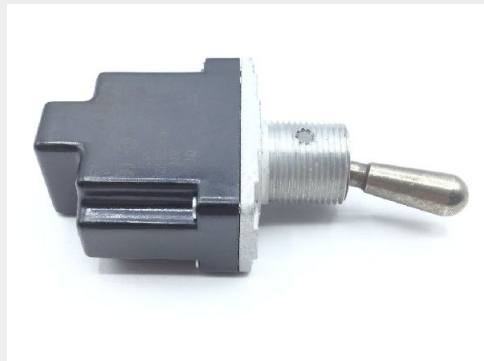

* See page 2 for technical characteristics

P/N 1TL1-2 Specifications

| | |
|--|---|
| Thread Class: | 2a |
| Body Style: | Bushing Mount |
| Overall Length: | 1.270 Inches Maximum |
| Bushing Length: | 0.455 Inches Minimum And 0.485 Inches Maximum |
| Body Length: | 1.270 Inches Maximum |
| Body Width: | 0.635 Inches Maximum |
| Body Height: | 0.890 Inches Minimum And 0.930 Inches Maximum |
| Actuator Style: | Round |
| Actuator Diameter: | 0.237 Inches Minimum And 0.243 Inches Maximum |
| Actuator Height: | 0.665 Inches Minimum And 0.695 Inches Maximum |
| Actuator Position-action Relationship: | Up Position Maintained And Down Position Maintained |
| Maximum Voltage Rating In Volts: | 115.0 Ac And 28.0 Dc |
| End Item Identification: | Mrap Buffalo Mk2a2 |
| Inclosure Type: | Fully Inclosed |
| Mounting Method: | Threaded Bushing |
| Features Provided: | Actuator Seal |
| Thread Quantity Per Inch: | 32 |
| Nominal Thread Size: | 0.469 Inches |
| Nonpile-up Contact Arrangement: | 1 Pole, Double Throw, Both Positions Maintained Single Switch Unit |
| Contact Load Current Rating At Maximum Rated Voltage: | 20.000 Amperes Resistive Dc And 15.000 Amperes Inductive Dc And 5.000 Amperes Lamp Dc And 15.000 Amperes Resistive Ac And 10.000 Amperes Inductive Ac And 3.000 Amperes Lamp Ac |
| Test Data Document: | 81349-mil-s-3950 Specification (includes Engineering Type Bulletins, Brochures,etc., That Reflect Specification Type Data In Specification Format; Excludes Commercial Catalogs, Industry Directories, And Similar Trade Publications, Reflecting General Type Data On Certain Environmental And Performance Requirements And Test Conditions That Are Shown As "typical", "average", "nominal", Etc.). |
| Thread Series Designator: | Uns |
| Terminal Type And Quantity: | 2 Screw |

How to Order

Order this toggle switch from our inventory online by visiting <https://military-fasteners.com/switches/toggle+switches/1TL1-2> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.