

**Description**


total panel thickness 0.09" - 0.119", corrosion resistant steel, philips recess

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	26S513
Minimum Qty (MOQ):	5
NSN:	5325-01-270-4289
ECCN:	EAR99
National Motor Freight:	066440, Fasteners Curtain / Snap Metal

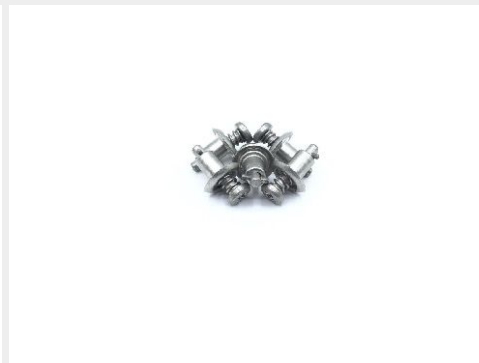

## P/N 26S51-3 Specifications

<b>Diameter:</b>	0.298 Inches Minimum And 0.308 Inches Maximum
<b>Securing Device Type:</b>	Spring
<b>Turnlock Stud Head Style:</b>	Fillister
<b>Stud Assembly Style:</b>	Stud Assembly
<b>Distance From Engaging Member To Largest Bearing Surface Of Head:</b>	0.611 Inches Nominal
<b>Eyelet Outside Diameter:</b>	0.244 Inches Minimum And 0.250 Inches Maximum
<b>Eyelet Length:</b>	0.332 Inches Nominal
<b>Material Accommodated Thickness:</b>	0.090 Inches Minimum And 0.119 Inches Maximum
<b>Drive Type:</b>	Cross Recess
<b>Material:</b>	Steel Comp 302 Ejector Spring
<b>Material:</b>	Steel Comp 302 Stud Or Steel Corrosion Resisting Stud
<b>Material:</b>	Steel Comp 302 Pin
<b>Material:</b>	Steel Comp 305 Eyelet
<b>Material Document And Classification:</b>	Astm A580 Assn Std Single Material Response Ejector Spring
<b>Material Document And Classification:</b>	Astm A580 Assn Std Single Material Response Pin
<b>Material Document And Classification:</b>	Qq-s-766 Fed Spec Single Material Response Eyelet
<b>Material Document And Classification:</b>	Stm A580 Fed Spec Single Material Response Stud Or Comp 384,cagec 71321 Mfr Ref 2nd Material Response Stud
<b>Surface Treatment:</b>	Passivate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec Single Treatment Response Overall

## How to Order

Order this turnlock fastener stud assembly from our inventory online by visiting <https://military-fasteners.com/studs/turnlock+fastener+stud+assemblies/26S51-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.