

Description

Pin-Rivet Collar part number

* Manufacturer certifications are shipped with your order FREE of charge


Order this part online

Additional Information

Alternate Part Numbers

[3SLCC06](#)

| | |
|-------------------------|---------------------|
| SKU / Model: | 3SLCC06 |
| Minimum Qty (MOQ): | 50 |
| NSN: | 5320-01-329-6719 |
| Schedule B: | 7616.99.5090 |
| ECCN: | EAR99 |
| National Motor Freight: | 013630, Alum Rivets |

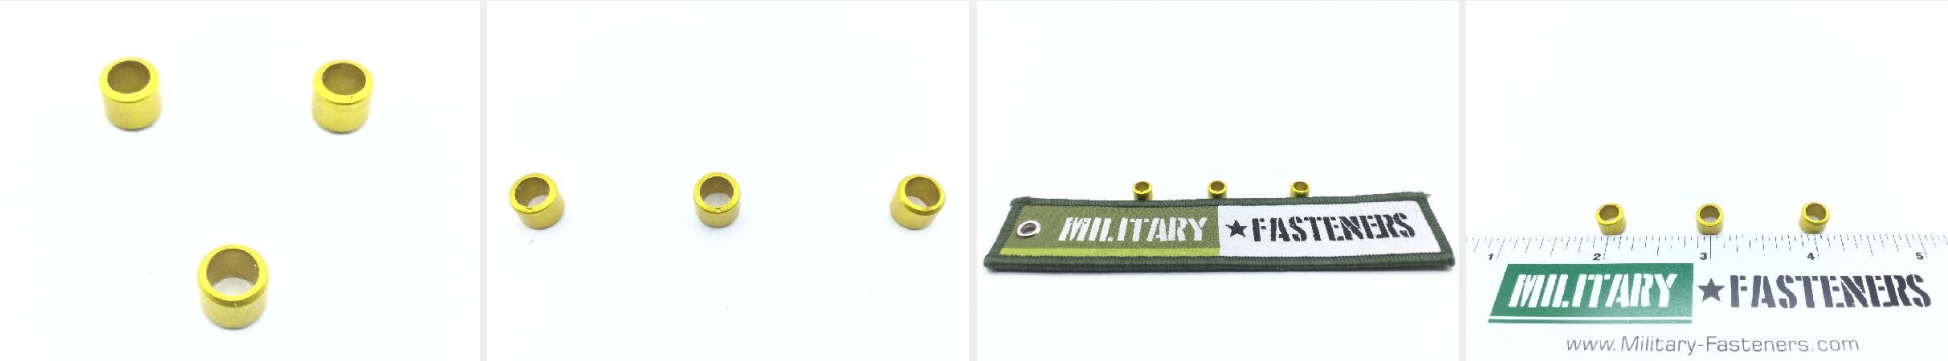

* See page 2 for technical characteristics

P/N 3SLC-C06 Specifications

| | |
|--|---|
| Collar Outside Diameter: | 0.268 Inches Minimum And 0.272 Inches Maximum |
| Collar Overall Height: | 0.215 Inches Minimum And 0.235 Inches Maximum |
| Collar Inside Diameter: | 0.188 Inches Minimum And 0.192 Inches Maximum |
| Collar Style: | Straight Type |
| Special Features: | Chamfered Ends,20 Degrees |
| Material: | Aluminum Alloy 2024 Overall |
| Material Document And Classification: | Qq-a-430 Fed Spec Single Material Response Overall |
| Surface Treatment: | Anodize Overall |
| Surface Treatment Document And Classification: | Mil-a-8625,ty 2,cl 2 Mil Spec Single Treatment Response Overall |

How to Order

Order this pin-rivet collar from our inventory online by visiting https://military-fasteners.com/collars/pin_rivet+collars/3SLC-C06 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.