

**Description**


Fastener Length: 3/16",

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                         |   |
|-------------------------|---|
| SKU / Model:            | AN123618                                    |
| Minimum Qty (MOQ):      | 100   |
| NSN:                    | 5320-00-297-2886                            |
| Schedule B:             | 7508.90.5000                                |
| ECCN:                   | EAR99                                       |
| National Motor Freight: | 106510, Rivets I / S Plain / Galvanized Etc |

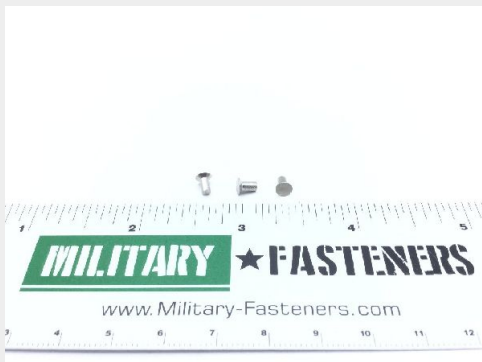

\* See page 2 for technical characteristics

## P/N AN123618 Specifications

|                             |  |
|-----------------------------|--|
| <b>Fastener Length:</b>     | 0.178 Inches Minimum And 0.198 Inches Maximum                                  |
| <b>Head Style:</b>          | Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer) |
| <b>Shank Diameter:</b>      | 0.093 Inches Minimum And 0.095 Inches Maximum                                  |
| <b>Shank Style:</b>         | Straight   |
| <b>Head Major Diameter:</b> | 0.164 Inches Minimum And 0.172 Inches Maximum                                  |
| <b>Grip Length:</b>         | 0.009 Inches Minimum And 0.029 Inches Maximum                                  |
| <b>Countersink Angle:</b>   | 98.5 Degrees Minimum And 101.5 Degrees Maximum                                 |
| <b>Material:</b>            | Nickel Alloy Overall   |

## How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/AN123618> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.