

P/N AN3-7

Military-Fasteners.com

Description


Length: 29/32, grip: 1/2", thread: 10-32, cadmium plated steel, drilled shank

* Manufacturer certifications are shipped with your order <u>FREE</u> of charge

Order this part online

Additional Information

SKU / Model:	AN37
Minimum Qty (MOQ):	25
NSN:	5306-00-144-3648
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

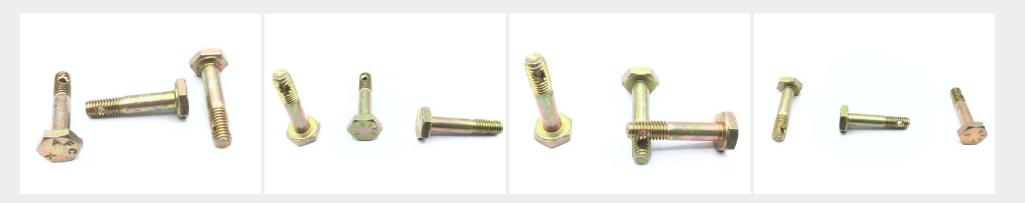

P/N AN3-7 Specifications

Thread Difection:Right-handThread Length:0.375 Inches Minimum And 0.453 Inches MaximumFastener Length:0.891 Inches Minimum And 0.938 Inches MaximumHead Style:HexagonHead Height:0.109 Inches Minimum And 0.141 Inches MaximumWidth Between Flats:0.365 Inches Minimum And 0.377 Inches MaximumShank Unthreaded Hole Diameter:0.070 Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:0.190 Inches Minimum And 0.516 Inches MaximumShank Unthreaded Hole Diameter:0.190 InchesOutrol Inches Minimum And 0.516 Inches MaximumFeatures Provided:Finished HeadFreat Quantity Per Inch:32Sufface From Head LargestBearing Sufface Toos Hanimum First Hole And 0.781 Inches Maximum First HoleDistance From Head LargestNoriend Or Steel Comp 8740 Overall Or Steel Comp 8730 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 8740 Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6059 Mil Spec 1st Material Response Overall Or Mil-s-6758 Mil Spec 3rd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6059 Mil Spec 2nd Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6059 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6059 Mil Spec 4th Material Response Overall Or Material Response Overall Or Mil-s-6058 Mil Spec 4th Material Response Overall Or <b< th=""><th>Thread Class:</th><th>За</th></b<>	Thread Class:	За
Thread Length:0.375 Inches Minimum And 0.453 Inches MaximumFastener Length:0.891 Inches Minimum And 0.938 Inches MaximumHead Style:HexagonHead Height:0.109 Inches Minimum And 0.111 Inches MaximumWidth Between Flats:0.365 Inches Minimum And 0.377 Inches MaximumShak Unthreaded Hole Diameter:0.070 Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:0.190 InchesOnthes Minimum And 0.516 Inches MaximumFirst HolePeatures Provided:0.484 Inches Minimum And 0.516 Inches MaximumFreatures Provided:12000 Pounds Per Square InchMinimum Ensile Strength:12000 Pounds Per Square InchBearing Surface From Head Largest Bearing Surface Trom Head Largest Center:Stel Comp 4140 Overall On Stel Comp 8740 Overall Or Stel Comp 8630 Overall Or Stel Comp 8735 Overall Or Stel Comp 4130Material Document And Classification:Mils-5626 Mil Spec 1st Material Response Overall Or Mils-6049 Mil Spec 2nd Material Response Overall Or Mils-6050 Mil Spec 1st Material Response Overall Or Mils-6059 Mil Spec 1st Material Response Overall Or Mils-6059 Mil Spec 1st Material Response Overall Or Mils-6059 Mil Spec 3th Material Response Overall Or Mils-6059 Mil Spec 1st Material Response Overall Or Mils-6059 Mil Spec		
Fastener Length:0.891 Inches Minimum And 0.938 Inches MaximumHead Style:HexagonHead Height:0.109 Inches Minimum And 0.141 Inches MaximumWidth Between Flats:0.365 Inches Minimum And 0.377 Inches MaximumShank Unthreaded Hole Diameter:0.370 Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:0.109 Inches Minimum And 0.371 Inches Maximum First HoleOntol Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:Origi Length:0.484 Inches Minimum And 0.516 Inches MaximumFastures Provided:Finished HeadFraed Quantity Per Inch:32J225000 Pounds Per Square InchMinimum Tensile Strength:125000 Pounds Per Square InchDistance From Head Largest Bearing Surface To Shank Hole Center:Center:Material:Center Comp 4140 Overall Or Stel Comp 8740 Overall Or Stel Comp 8630 Overall Or Stel Comp 873 Overall Or Stel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6058 Mil Spec 5th Mater		Right-hand
Head Style:HexagonHead Height:0.109 Inches Minimum And 0.141 Inches MaximumWidth Between Flats:0.365 Inches Minimum And 0.377 Inches MaximumShank Unthreaded Hole Diameter:0.070 Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:0.190 InchesOligo Inches Minimum And 0.516 Inches MaximumFirst Hole And 0.080 Inches MaximumFeatures Provided:0.484 Inches Minimum And 0.516 Inches MaximumFreatures Provided:1200 Pounds Per Square InchThread Quantity Per Inch:2200 Pounds Per Square InchBararing Surface To Shank Hole26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum First HoleDistance From Head Largests Bearing Surface To Shank Hole0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial Document And Classification:Steel Comp 1410 Overall Or Steel Comp 8740 Overall Or Steel Comp 8730 Overall Or Steel Comp 4037 OverallSurface Treatment Document And Classification:Cadmium Overall And Response Overall Or Mil-s-6058 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Mil-s-6058 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Mil-s-6058 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response OverallSurface Treatment Document And Classification:Cadmium Overall And Chromate OverallSurface Treatment Document And Classification:Cadmium Overall And Chromate OverallSurface Treatment Document And Classification:Cadmium Overall And Chromate Overall	Thread Length:	0.375 Inches Minimum And 0.453 Inches Maximum
Head Height:0.109 Inches Minimum And 0.141 Inches MaximumWidth Between Flats:0.365 Inches Minimum And 0.377 Inches MaximumShank Unthreaded Hole Diameter:0.070 Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:0.190 InchesOrg Length:0.484 Inches Minimum And 0.516 Inches MaximumFeatures Provided:Finished HeadThread Quantity Per Inch:32Distance From Head Largest Bearing Surface Too Shank HoleSto00 Pounds Per Square InchDistance From Head Largest Bearing Surface Too Shank HoleSteel Comp 4140 Overall And 32.0 Rockwell C Maximum First HoleMaterial Bocument And Canterial Context Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4037 OverallMaterial Document And Cassification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6059 Mil Spec 3rd Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or <br< th=""><th>Fastener Length:</th><th>0.891 Inches Minimum And 0.938 Inches Maximum</th></br<>	Fastener Length:	0.891 Inches Minimum And 0.938 Inches Maximum
Width Beween Flats:0.365 Inches Minimum And 0.377 Inches MaximumShank Unthreaded Hole Diameter:0.070 Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:0.190 InchesGrip Length:0.484 Inches Minimum And 0.516 Inches MaximumFeatures Provided:0.484 Inches Minimum And 0.516 Inches MaximumThread Quantity Per Inch:32Jacob Pounds Per Square Inch2500 Pounds Per Square InchHardness Rating:26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum OverallDistance From Head Largest Bearing Surface To Shank Holeo.fos Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial Document And Casterial Strength:c.fos Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4037 OverallMaterial Bocument And Cassification:Mils-S626 Mil Spec 1st Material Response Overall Or Mils-6049 Mil Spec 2nd Material Response Overall Or Mils-6039 Mil Spec 4th Material Response Overall Or Mils-6058 Mil Spec 3th Material Response Overall Or Mils-6049 Mil Spec 4th Material Response Overall Or Mils-6058 Mil Spec 5th Material Response Overall Or Mils-6049 Mil Spec 4th Material Response Overall Or Mils-6058 Mil Spec 3th Material Response Overall Or Mils-6049 Mil Spec 4th Material Response Overall Or Mils-6058 Mil Spec 4th Material Response	Head Style:	Hexagon
Shank Unthreaded Hole Diameter:0.701 Inches Minimum First Hole And 0.080 Inches Maximum First HoleNominal Thread Diameter:0.190 InchesGrip Length:0.484 Inches Minimum And 0.516 Inches MaximumFeatures Provided:Finished HeadThread Quantity Per Inch:32Minimum Tensile Strength:125000 Pounds Per Square InchBearing Surface Trom Head Largest Bearing Surface To Shank Hole	Head Height:	0.109 Inches Minimum And 0.141 Inches Maximum
Nominal Thread Diameter:0.190 InchesGrip Length:0.484 Inches Minimum And 0.516 Inches MaximumFeatures Provided:Finished HeadThread Quantity Per Inch:32Minimum Tensile Strength:125000 Pounds Per Square InchHardness Rating:26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum OverallDistance From Head Largest Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial:Steel Comp 1440 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 4037 OverallMaterial:Will-s-6626 Mil Spec 1st Material Response Overall Or Mil-s-6098 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response OverallSurface Treatment:Cadmium Overall And Chromate OverallSurface Treatment Document And Classification:Qep-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Width Between Flats:	0.365 Inches Minimum And 0.377 Inches Maximum
Grip Length:0.484 Inches Minimum And 0.516 Inches MaximumFeatures Provided:Finished HeadThread Quantity Per Inch:32Minimum Tensile Strength:125000 Pounds Per Square InchHardness Rating:26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum OverallDistance From Head Largest Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial:Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Steel Comp 4140 Chromate Overall And Chromate OverallSurface Treatment:Cadmium Overall And Chromate Overall Overall And Chromate OverallSurface Treatment Document And Classification:Q-p-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Shank Unthreaded Hole Diameter:	0.070 Inches Minimum First Hole And 0.080 Inches Maximum First Hole
Features Provided:Finished HeadFeatures Provided:Finished HeadThread Quantity Per Inch:32Minimum Tensile Strength:125000 Pounds Per Square InchHardness Rating:26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum OverallDistance From Head Largest Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First Hole Core Comp 8730 Overall Or Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Ams 6300 Assn Std 6th Material Response OverallSurface Treatment:Cadmium Overall And Chromate Overall Q-p-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Nominal Thread Diameter:	0.190 Inches
Thread Quantity Per Inch:32Minimum Tensile Strength:125000 Pounds Per Square InchHardness Rating:26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum OverallDistance From Head Largest Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial:Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response OverallSurface Treatment:Cadmium Overall And Chromate Overall Qep-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Grip Length:	0.484 Inches Minimum And 0.516 Inches Maximum
Minimum Tensile Strength:125000 Pounds Per Square InchHardness Rating:26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum OverallDistance From Head Largest Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First Hole Overall Or Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Mareial Response OverallSurface Treatment:Cadmium Overall And Chromate Overall Qq-p-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Features Provided:	Finished Head
Hardness Rating:26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum OverallDistance From Head Largest Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial:Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response OverallSurface Treatment:Cadmium Overall And Chromate OverallQu-p-416,ty 2,cl 3 Fed Spec All Treatment Response OverallQu-p-416,ty 2,cl 3 Fed Spec All Treatment Response Overall	Thread Quantity Per Inch:	32
Distance From Head Largest Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial:Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response OverallSurface Treatment:cadmium Overall And Chromate OverallQuep-416,ty 2,cl 3 Fed Spec All Treatment Response OverallQuep-416,ty 2,cl 3 Fed Spec All Treatment Response Overall	Minimum Tensile Strength:	125000 Pounds Per Square Inch
Bearing Surface To Shank Hole Center:0.750 Inches Minimum First Hole And 0.781 Inches Maximum First HoleMaterial:Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 4130 Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Overall Or Mil-s-6050 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Overall Or Mil-s-6058 Mil Spec 5th Material Response OverallSurface Treatment:Cadmium Overall And Chromate Overall Qep-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Hardness Rating:	26.0 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum Overall
Material:Overall Or Steel Comp 4037 OverallMaterial Document And Classification:Mil-s-5626 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 4th Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 4th Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 4th Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6098 Mil Spec 4th Material	Distance From Head Largest Bearing Surface To Shank Hole Center:	0.750 Inches Minimum First Hole And 0.781 Inches Maximum First Hole
Material Document And Classification:Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or Ams 6300 Assn Std 6th Material Response OverallSurface Treatment:Cadmium Overall And Chromate OverallSurface Treatment Document And Classification:Qq-p-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Material:	
Surface Treatment Document And Classification:	Material Document And Classification:	Material Response Overall Or Mil-s-6098 Mil Spec 4th Material Response Overall Or Mil-s-6758 Mil Spec 5th Material Response Overall Or
Classification: Qq-p-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall	Surface Treatment:	Cadmium Overall And Chromate Overall
	Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 3 Fed Spec All Treatment Responses Overall
Inread Series Designator: 000	Thread Series Designator:	Unf

How to Order

Order this machine bolt from our inventory online by visiting <u>https://military-fasteners.com/bolts/machine+bolts/AN3-7</u> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out <u>here</u> to complete your order.