

## P/N AN3CH16A

## **Description**

Fastener Length: 1-3/4", Hole Diameter: 1/32", Thread: 10-32, Thread Length: 3/8

\* Manufacturer certifications are shipped with your order <u>FREE</u> of charge

### Order this part online

#### **Additional Information**

SKU / Model: AN3CH16A


Minimum Qty (MOQ): 10

NSN: 5306-00-180-2774

Schedule B: 7318.15.8085

ECCN: EAR99

National Motor Freight: 093486, Bolts, nuts Or Screws, Noi (sub 3)

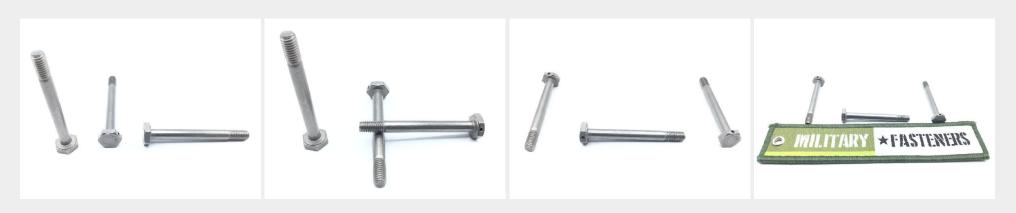

<sup>\*</sup> See page 2 for technical characteristics

# **P/N AN3CH16A Specifications**

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.406 Inches Minimum
Fastener Length:	1.781 Inches Nominal
Head Style:	Hexagon
Head Height:	0.109 Inches Minimum And 0.141 Inches Maximum
Width Between Flats:	0.365 Inches Minimum And 0.377 Inches Maximum
Hole Diameter:	0.046 Inches Nominal
Nominal Thread Diameter:	0.190 Inches
Grip Length:	1.375 Inches Nominal
Hole Quantity:	1
Hole Type:	Drilled
Features Provided:	Finished Head
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Hole Configuration Style:	Hexagon Flats
Material:	Steel Corrosion Resisting Overall
Material Document And Classification:	Qq-s-770 Fed Spec Single Material Response Overall
Surface Treatment:	Passivate Overall
Thread Series Designator:	Unf

## **How to Order**

Order this machine bolt from our inventory online by visiting <a href="https://military-fasteners.com/bolts/machine+bolts/AN3CH16A">https://military-fasteners.com/bolts/machine+bolts/AN3CH16A</a> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out here to complete your order.