

Description



length: 1", grip: 19/32", thread: 10-32, cadmium plated steel, philips recess, structural

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN52510R16
Minimum Qty (MOQ):	100
NSN:	5305-00-180-3326
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

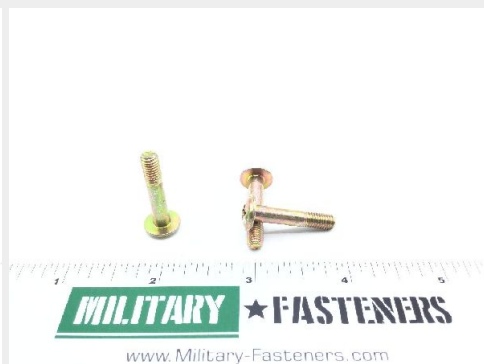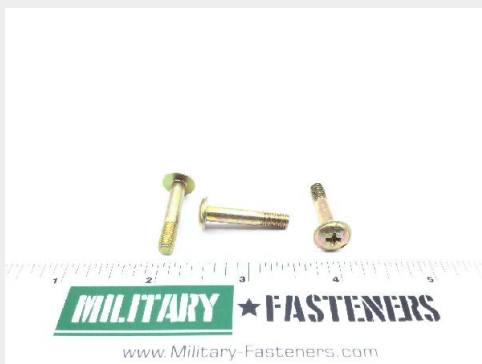

* See page 2 for technical characteristics

P/N AN525-10R16 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.344 Inches Minimum
Fastener Length:	0.969 Inches Minimum And 1.031 Inches Maximum
Head Style:	Round Extended Washer
Head Diameter:	0.375 Inches Nominal
Head Height:	0.089 Inches Minimum And 0.099 Inches Maximum
Extended Washer Diameter:	0.437 Inches Nominal
Extended Washer Thickness:	0.030 Inches Nominal
Internal Drive Style:	Slot
Nominal Thread Diameter:	0.190 Inches
Thread Quantity Per Inch:	32
Screw Material:	Steel Comp 2330
Screw Material Document And Classification:	An-qq-s-689 Cancelled Fed Spec Single Material Response
Screw Surface Treatment:	Cadmium Or Zinc
Screw Surface Treatment Document And Classification:	An-p-61 Cancelled Fed Spec 1st Treatment Response Or An-p-32 Cancelled Fed Spec 2nd Treatment Response
Thread Series Designator:	Unf

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/AN525-10R16> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.