

Description


length: 1", grip: 19/32", thread: 1/4-28, cadmium plated steel, philips recess, AN525 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN525416R16
Minimum Qty (MOQ):	20
NSN:	5305-00-637-6395
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

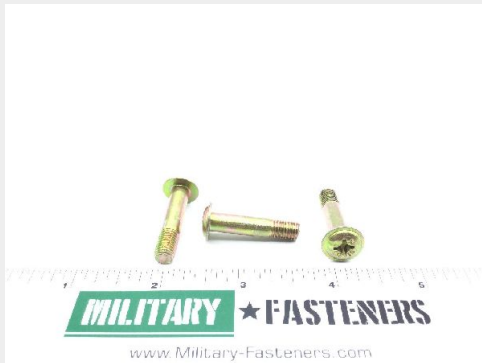

* See page 2 for technical characteristics

P/N AN525-416R16 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.335 Inches Minimum
Fastener Length:	0.969 Inches Minimum And 1.031 Inches Maximum
Head Style:	Round Extended Washer
Head Diameter:	0.437 Inches Nominal
Head Height:	0.101 Inches Nominal
Extended Washer Diameter:	0.500 Inches Nominal
Extended Washer Thickness:	0.028 Inches Minimum And 0.033 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.250 Inches
Thread Quantity Per Inch:	28
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Screw Material:	Steel Comp 2330
Screw Surface Treatment:	Cadmium And Zinc
Screw Surface Treatment Document And Classification:	An-p-61 /canceled/ Fed Spec 1st Treatment Response Or An-p-32 /canceled/ Fed Spec 2nd Treatment Response
Thread Series Designator:	Unf

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/AN525-416R16> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.