

Description


Length: 3/16, thread: 4-40, flat point

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | AN565A4H3 |
| Minimum Qty (MOQ): | 25 |
| NSN: | 5305-00-619-5705 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

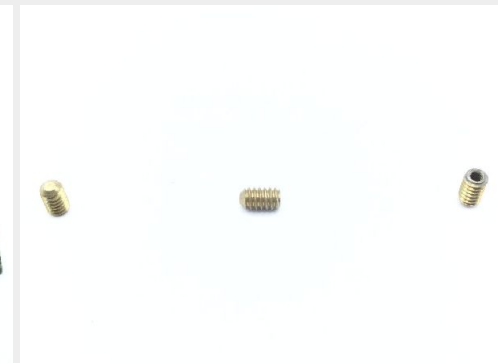

P/N AN565A4H3 Specifications

| | |
|-------------------------------------|---|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.188 Inches Maximum |
| Fastener Length: | 0.188 Inches Nominal |
| Head Style: | Headless (setscrew) |
| Point Style: | Flat |
| Internal Drive Style: | Hexagon |
| Nominal Thread Diameter: | 0.112 Inches |
| Width Across Flats: | 0.050 Inches Minimum And 0.051 Inches Maximum |
| Thread Quantity Per Inch: | 40 |
| Hardness Rating: | 45.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall |
| Material: | Steel Overall |
| Surface Treatment: | Cadmium Overall |
| Thread Series Designator: | Unc |
| Nondefinitive Spec/std Data: | 3 Type And 1 Style |

How to Order

Order this setscrew from our inventory online by visiting <https://military-fasteners.com/screws/setscrews/AN565A4H3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.