

Description

outer diameter: 3/8", thread: 9/16-18, aluminum, AN6289 series fitting



* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[AS5179D06](#)

SKU / Model:	AN6289D6
Minimum Qty (MOQ):	5
NSN:	4730-00-277-5083
Schedule B:	7616.10.9090
ECCN:	EAR99
National Motor Freight:	013540, Alum Nuts

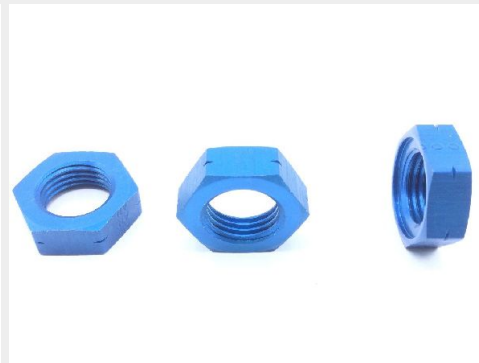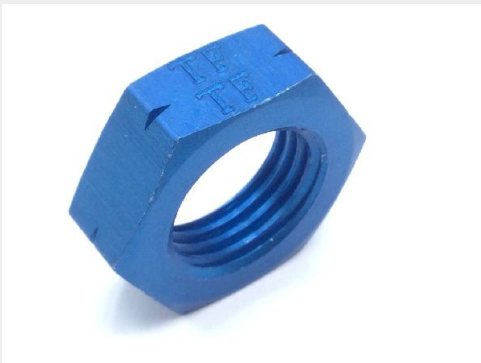

* See page 2 for technical characteristics

P/N AN6289D6 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Fabrication Method:	Machined
Nut Style:	Tube Fitting Locknut
Nut Height:	0.250 Inches Minimum And 0.282 Inches Maximum
Width Across Flats:	0.809 Inches Minimum And 0.816 Inches Maximum
Thread Series:	Unjf
Packing Recess Diameter:	0.728 Inches Minimum And 0.738 Inches Maximum
Packing Recess Depth:	0.037 Inches Minimum And 0.047 Inches Maximum
Thread Quantity Per Inch:	18
Nominal Thread Size:	0.562 Inches
Nominal Tube Outside Diameter:	0.375 Inches
Material:	Aluminum Alloy 2024 Overall
Material Document And Classification:	Qq-a-225/6 Fed Spec Single Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec Single Treatment Response Overall
Specification/standard Data:	88044-an6289 Government Standard

How to Order

Order this tube fitting locknut from our inventory online by visiting <https://military-fasteners.com/fittings/tube+fitting+locknuts/AN6289D6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.