

Description

tube outer diameter: 1/8", thread: 5/16-24, aluminum, with lockwire holes


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[AS5169D02L](#)

SKU / Model:	AN8142DL
Minimum Qty (MOQ):	2
NSN:	5365-00-289-0032
ECCN:	EAR99
National Motor Freight:	013120, Aluminum Article Noi Sub 6

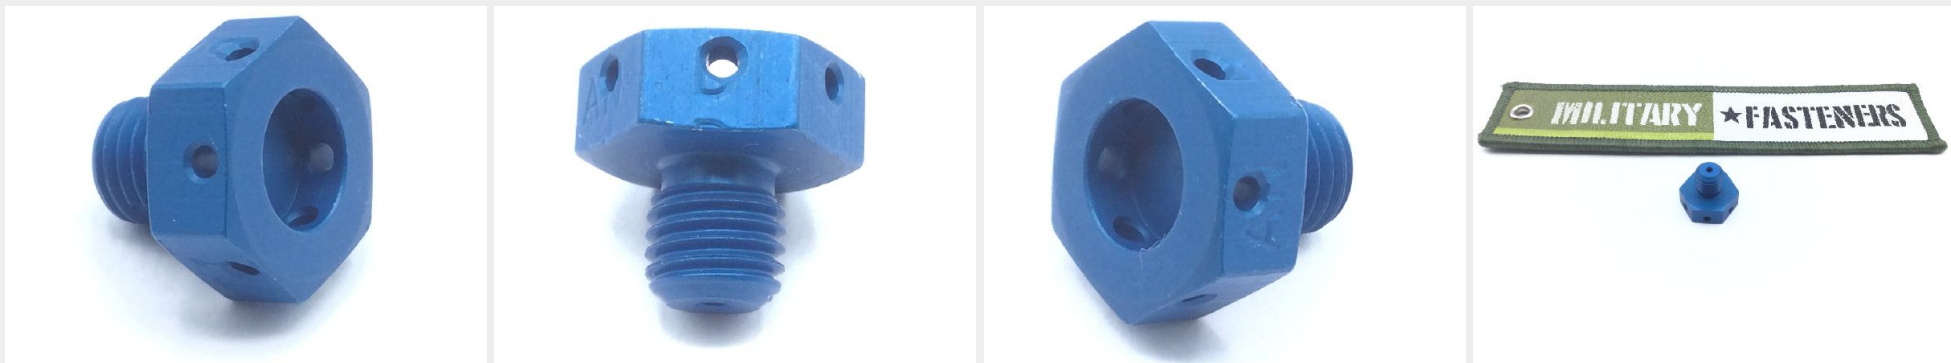

* See page 2 for technical characteristics

P/N AN814-2DL Specifications

Thread Class:	3a External
Thread Direction:	Right-hand External
Thread Length:	0.234 Inches Minimum External And 0.249 Inches Maximum External
Thread Length:	0.234 Inches Minimum And 0.249 Inches Maximum External
Head Height:	0.234 Inches Nominal
Overall Length:	0.547 Inches Nominal
Unable To Decode:	Unable To Decode
Connection Style:	Plain
Body Core Diameter:	0.062 Inches Nominal
Core Depth:	0.250 Inches Minimum And 0.282 Inches Maximum
Bleeder Hole Center To Threaded End Distance:	0.125 Inches Minimum And 0.187 Inches Maximum
Bleeder Hole Diameter:	0.062 Inches Nominal
Nominal Thread Size:	0.312 Inches External
Material:	Aluminum Alloy Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,ty 2,cl 1 Mil Spec Single Treatment Response Overall
Style Designator:	Plug, Machine W/bleeder Holes
Thread Series Designator:	Unf External

How to Order

Order this machine thread plug from our inventory online by visiting <https://military-fasteners.com/fittings/machine+thread+plugs/AN814-2DL> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.