

**Description**


tube outer diameter: 1/8", thread: 5/16-24, aluminum, with lockwire holes

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	AN8142DL
Minimum Qty (MOQ):	2
NSN:	5365-00-289-0032
ECCN:	EAR99
National Motor Freight:	013120, Aluminum Article Noi Sub 6

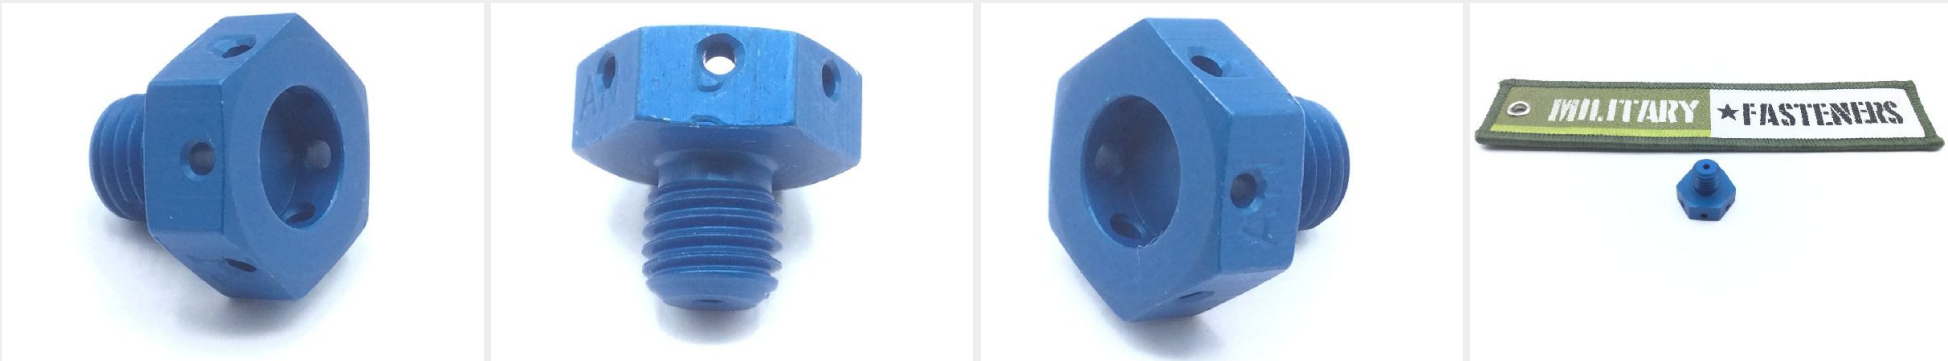

## P/N AN814-2DL Specifications

<b>Thread Class:</b>	3a External
<b>Thread Direction:</b>	Right-hand External
<b>Thread Length:</b>	0.234 Inches Minimum External And 0.249 Inches Maximum External
<b>Thread Length:</b>	0.234 Inches Minimum And 0.249 Inches Maximum External
<b>Head Height:</b>	0.234 Inches Nominal
<b>Overall Length:</b>	0.547 Inches Nominal
<b>Unable To Decode:</b>	Unable To Decode
<b>Connection Style:</b>	Plain
<b>Body Core Diameter:</b>	0.062 Inches Nominal
<b>Core Depth:</b>	0.250 Inches Minimum And 0.282 Inches Maximum
<b>Bleeder Hole Center To Threaded End Distance:</b>	0.125 Inches Minimum And 0.187 Inches Maximum
<b>Bleeder Hole Diameter:</b>	0.062 Inches Nominal
<b>Nominal Thread Size:</b>	0.312 Inches External
<b>Material:</b>	Aluminum Alloy Overall
<b>Surface Treatment:</b>	Anodize Overall
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625,ty 2,cl 1 Mil Spec Single Treatment Response Overall
<b>Style Designator:</b>	Plug, Machine W/bleeder Holes
<b>Thread Series Designator:</b>	Unf External

## How to Order

Order this machine thread plug from our inventory online by visiting <https://military-fasteners.com/fittings/machine+thread+plugs/AN814-2DL> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.