

Description

tube outer diameter: 3/16", thread: 3/8-24, aluminum, bleeder with lockwire holes

* Manufacturer certifications are shipped with your order FREE of charge


Order this part online

Additional Information

Alternate Part Numbers

[AS5169D03L](#)

| | |
|-------------------------|------------------------------------|
| SKU / Model: | AN8143DL |
| Minimum Qty (MOQ): | 5 |
| NSN: | 5365-00-287-0095 |
| ECCN: | EAR99 |
| National Motor Freight: | 013120, Aluminum Article Noi Sub 6 |

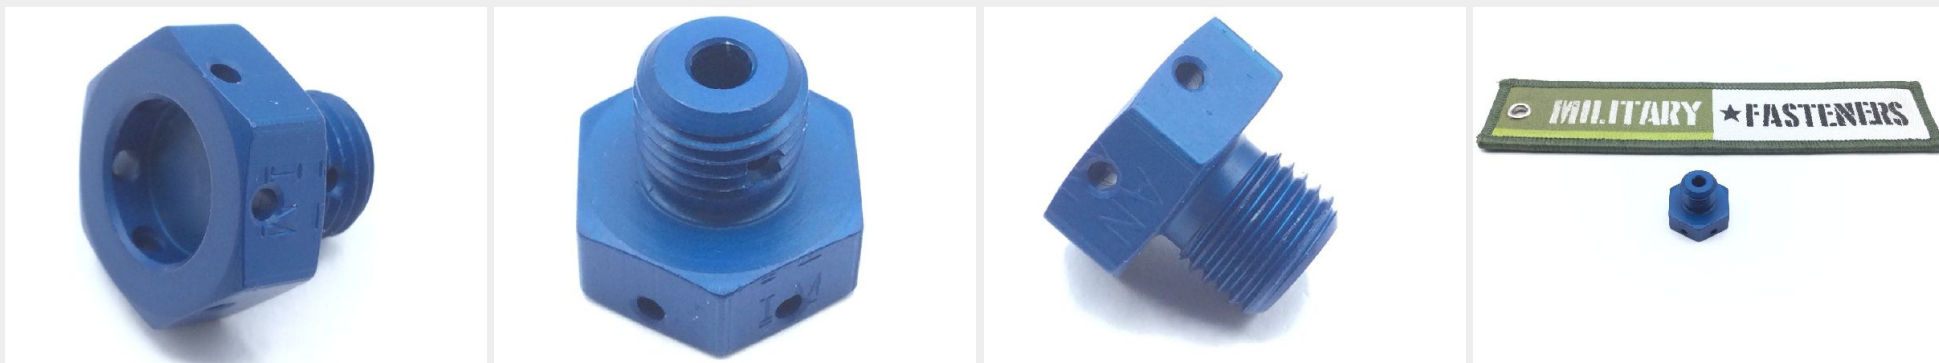

* See page 2 for technical characteristics

P/N AN814-3DL Specifications

| | |
|--|---|
| Thread Class: | 3a External |
| Thread Direction: | Right-hand External |
| Thread Length: | 0.266 Inches Nominal External |
| Head Height: | 0.234 Inches Nominal |
| Overall Length: | 0.562 Inches Nominal |
| Unable To Decode: | Unable To Decode |
| Connection Style: | Plain |
| Body Core Diameter: | 0.125 Inches Nominal |
| Core Depth: | 0.250 Inches Minimum And 0.266 Inches Maximum |
| Bleeder Hole Center To Threaded End Distance: | 0.125 Inches Minimum And 0.187 Inches Maximum |
| Bleeder Hole Diameter: | 0.062 Inches Nominal |
| Nominal Thread Size: | 0.375 Inches External |
| Seat Angle: | 45.0 Degrees |
| Material: | Aluminum Alloy Overall |
| Surface Treatment: | Anodize Overall |
| Style Designator: | Plug, Machine W/bleeder Holes |
| Thread Series Designator: | Unf External |

How to Order

Order this machine thread plug from our inventory online by visiting <https://military-fasteners.com/fittings/machine+thread+plugs/AN814-3DL> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.