

Description


tube outer diameter: 5/8" pipe diameter: 1/2", thread: 7/8-14, straight pipe to flared tube, corrosion resistant steel

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN81610J
Minimum Qty (MOQ):	1
NSN:	4730-00-405-9736
ECCN:	EAR99
National Motor Freight:	052190, Pipe,tubing,or Pipe Or Tubing Fitti

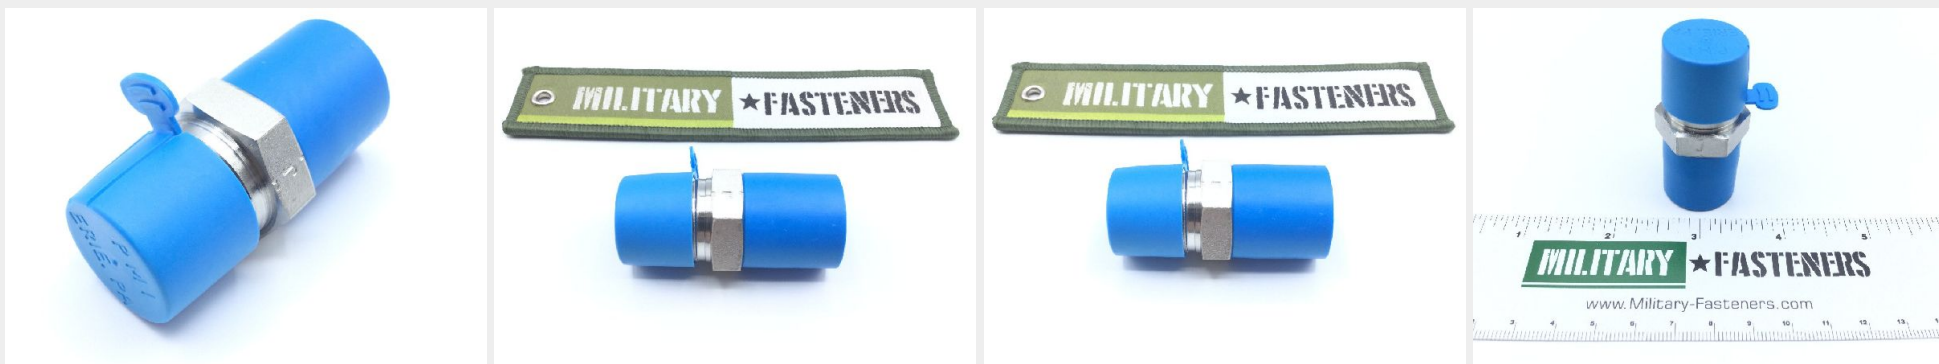

* See page 2 for technical characteristics

P/N AN816-10J Specifications

Thread Class:	3a 2nd End
Connection Style:	Flared W/ Gasket Seal (boss) 2nd End
Connection Style:	Plain (pipe) 1st End
Connection Type:	Threaded External Boss 2nd End
Connection Type:	Threaded External Pipe 1st End
Nominal Thread Size:	0.500 Inches 1st End
Nominal Thread Size:	0.875 Inches 2nd End
Nominal Overall Length:	1.828 Inches
Special Features:	Center Wrenching
Material:	Steel Comp 304 Overall
Material Document And Classification:	66 Fed Std Single Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Mil-f-14072,e300,ty2 Mil Spec Single Treatment Response Outside
Surface Treatment Document And Classification:	Mil-s-5002 Mil Spec Single Treatment Response Inside
Thread Series Designator:	Anpt 1st End
Thread Series Designator:	Unjf 2nd End
Furnished Items And Quantity:	1 Preformed Packing
Specification/standard Data:	81343-as4842/1 Professional/industrial Association Standard

How to Order

Order this straight pipe to boss adapter from our inventory online by visiting <https://military-fasteners.com/fittings/straight+pipe+to+boss+adapters/AN816-10J> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.