

**Description**

internal pipe thread: 1/4" external pipe thread: 1/2", pipe thread reducer, aluminum


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[AS5174D0603](#)

SKU / Model:	AN9125D
Minimum Qty (MOQ):	5
NSN:	4730-00-194-0206
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

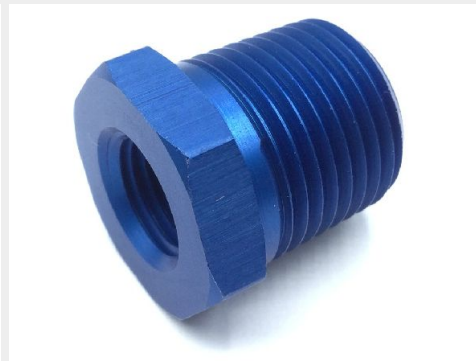

# P/N AN912-5D Specifications

<b>External Thread Size:</b>	1/2-14
<b>Internal Thread Size:</b>	1/4-18
<b>Working Pressure And Service Type:</b>	3000.0 Pounds Per Square Inch Nominal Hydraulic Oil Err-100 Err-100
<b>Working Pressure And Service Type:</b>	3000.0 Pounds Per Square Inch Nominal Liquid Err-100 Err-100
<b>Working Pressure And Service Type:</b>	3000.0 Pounds Per Square Inch Nominal Oxygen, Gaseous Err-100 Err-100
<b>Working Pressure And Service Type:</b>	3000.0 Pounds Per Square Inch Nominal Oxygen, Gaseous
<b>Working Pressure And Service Type:</b>	3000.0 Pounds Per Square Inch Nominal Hydraulic Oil
<b>Working Pressure And Service Type:</b>	3000.0 Pounds Per Square Inch Nominal Liquid
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Liquid Err-100 Err-100
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Oxygen, Gaseous Err-100 Err-100
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Water Err-100 Err-100
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Hydraulic Oil Err-100 Err-100
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Hydraulic Oil
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Liquid
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Oxygen, Gaseous
<b>Working Temp And Service Type:</b>	225.0 Deg Fahrenheit Nominal Water
<b>External Screw Thread Series Designator:</b>	Anpt
<b>External Thread Direction:</b>	Right-hand
<b>Internal Screw Thread Series Designator:</b>	Anpt
<b>Internal Thread Direction:</b>	Right-hand
<b>Material:</b>	Aluminum Alloy, Qq-a-225/4, Alloy 2014, T6 Or Aluminum Alloy, Qq-a-225/6, Alloy 2024, T6
<b>Material:</b>	Aluminum Alloy 2014 Or Aluminum Alloy 2024
<b>Material Document And Classification:</b>	Qq-a-225/4, Alloy 2014, T6 Fed Spec 1st Material Response And Qq-a-225/6, Alloy 2024, T6 Fed Spec 2nd Material Response
<b>Surface Treatment:</b>	Anodize
<b>Style Designator:</b>	N1 Outside Hexagon Or Octagon (partial Or Full Thread Optional)
<b>Style Designator:</b>	Outside Hexagon Or Octagon (partial Or Full Thread Optional)
<b>Surface Treatment:</b>	Anodized, Mil-a-8625, Type 2, Class 2
<b>Specification/standard Data:</b>	81343-as4842 Professional/industrial Association Standard And 88044-an912 Government Standard

## How to Order

Order this pipe bushing from our inventory online by visiting <https://military-fasteners.com/fittings/pipe+bushings/AN912-5D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.