

**Description**


tube outer diameter: 5/8", thread: 7/8-14, corrosion resistant steel, male to male external thread, flared tube, large end

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	AN91913J
Minimum Qty (MOQ):	1
NSN:	4730-00-541-2742
ECCN:	EAR99
National Motor Freight:	052190, Pipe,tubing,or Pipe Or Tubing Fitti

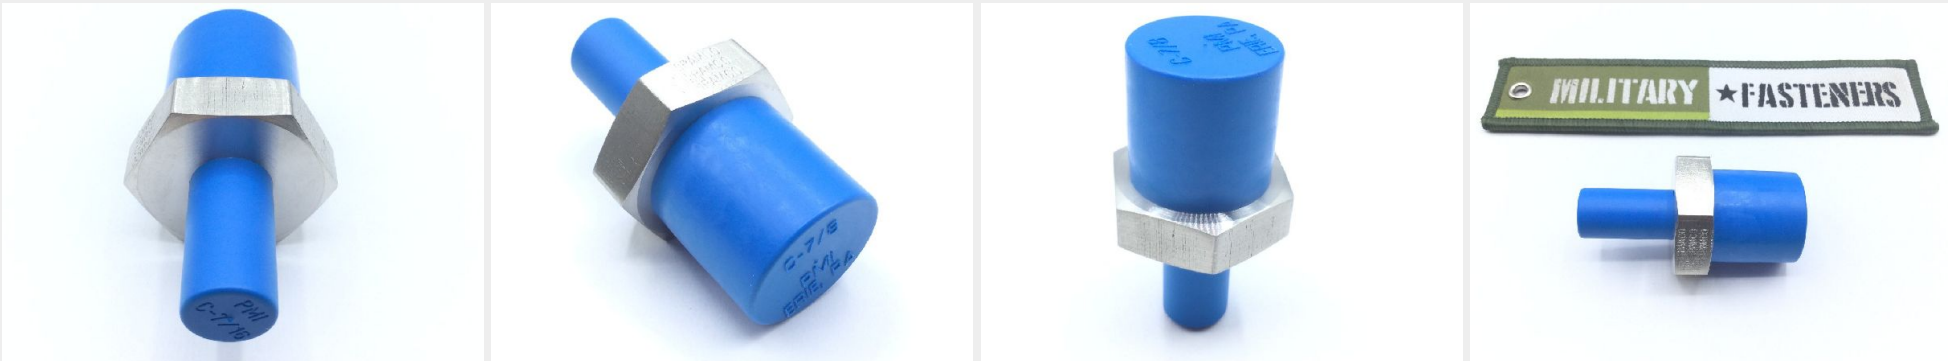

## P/N AN919-13J Specifications

<b>Thread Class:</b>	3a All Ends
<b>Reducer Type:</b>	Concentric
<b>Maximum Operating Temp:</b>	275.0 Deg Fahrenheit Single Response
<b>End Item Identification:</b>	Jwn Newport Class Lst
<b>Connection Style:</b>	Flared W/ Gasket Seal (boss) All Ends
<b>Connection Type:</b>	Threaded External Boss All Ends
<b>Maximum Operating Pressure:</b>	3000.0 Pounds Per Square Inch Single Response
<b>Nominal Thread Size:</b>	0.438 Inches 2nd End
<b>Nominal Thread Size:</b>	0.875 Inches 1st End
<b>Nominal Overall Length:</b>	1.656 Inches
<b>Material:</b>	Steel Comp 304 Overall
<b>Material Document And Classification:</b>	66 Fed Std Single Material Response Overall
<b>Surface Treatment:</b>	Passivate Overall
<b>Surface Treatment Document And Classification:</b>	Mil-f-14072,e300,ty 2 Mil Spec Single Treatment Response Outside
<b>Surface Treatment Document And Classification:</b>	Mil-s-5002 Mil Spec Single Treatment Response Inside
<b>Thread Series Designator:</b>	Unf 2nd End
<b>Thread Series Designator:</b>	Unjf 1st End
<b>Specification/standard Data:</b>	88044-an919 Government Standard And 96906-ms24399 Government Standard

## How to Order

Order this boss reducer from our inventory online by visiting <https://military-fasteners.com/fittings/boss+reducers/AN919-13J> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.