

Description


tube outer diameter: 5/8", thread: 7/8-14, corrosion resistant steel, male to male external thread, flared tube, large end

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN91913J
Minimum Qty (MOQ):	1
NSN:	4730-00-541-2742
ECCN:	EAR99
National Motor Freight:	052190, Pipe,tubing,or Pipe Or Tubing Fitti

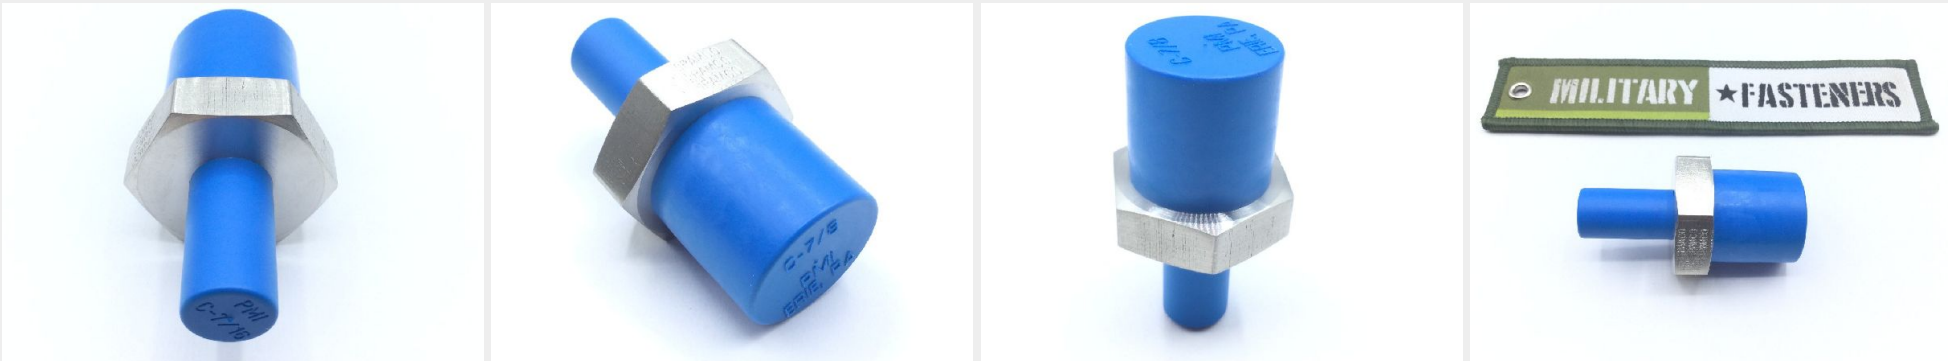

P/N AN919-13J Specifications

Thread Class:	3a All Ends
Reducer Type:	Concentric
Maximum Operating Temp:	275.0 Deg Fahrenheit Single Response
End Item Identification:	Jwn Newport Class Lst
Connection Style:	Flared W/ Gasket Seal (boss) All Ends
Connection Type:	Threaded External Boss All Ends
Maximum Operating Pressure:	3000.0 Pounds Per Square Inch Single Response
Nominal Thread Size:	0.438 Inches 2nd End
Nominal Thread Size:	0.875 Inches 1st End
Nominal Overall Length:	1.656 Inches
Material:	Steel Comp 304 Overall
Material Document And Classification:	66 Fed Std Single Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Mil-f-14072,e300,ty 2 Mil Spec Single Treatment Response Outside
Surface Treatment Document And Classification:	Mil-s-5002 Mil Spec Single Treatment Response Inside
Thread Series Designator:	Unf 2nd End
Thread Series Designator:	Unjf 1st End
Specification/standard Data:	88044-an919 Government Standard And 96906-ms24399 Government Standard

How to Order

Order this boss reducer from our inventory online by visiting <https://military-fasteners.com/fittings/boss+reducers/AN919-13J> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.