

Description


tube outer diameter: 5/16", thread: 1/2-20, male to male external thread, flared tube, aluminum,

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	AN9193D
Minimum Qty (MOQ):	2
NSN:	4730-00-684-7451
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

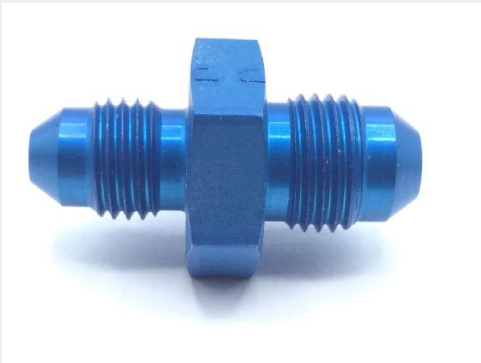

P/N AN919-3D Specifications

Thread Class:	3a 2nd End
Thread Class:	3a 1st End
Reducer Type:	Concentric
Connection Style:	Flared (tube) 1st End
Connection Style:	Flared (tube) 2nd End
Connection Type:	Threaded External Tube 1st End
Connection Type:	Threaded External Tube 2nd End
Nominal Thread Size:	0.438 Inches 2nd End
Nominal Thread Size:	0.500 Inches 1st End
Seat Angle:	37.0 Degrees 1st End
Seat Angle:	37.0 Degrees 2nd End
Nominal Outside Diameter Tube Accommodated:	0.250 Inches 2nd End
Nominal Outside Diameter Tube Accommodated:	0.312 Inches 1st End
Nominal Overall Length:	1.359 Inches
Material:	Aluminum Alloy Overall
Surface Treatment:	Anodize Inside
Surface Treatment:	Anodize Outside
Thread Series Designator:	Unjf All Ends

How to Order

Order this tube reducer from our inventory online by visiting <https://military-fasteners.com/fittings/tube+reducers/AN919-3D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.