

## Description


Fastener Length: 1/4", AS2230 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	AS2230405
Minimum Qty (MOQ):	250
NSN:	5320-00-012-2311
Schedule B:	7616.10.3000
ECCN:	9A991
National Motor Freight:	013630, Alum Rivets

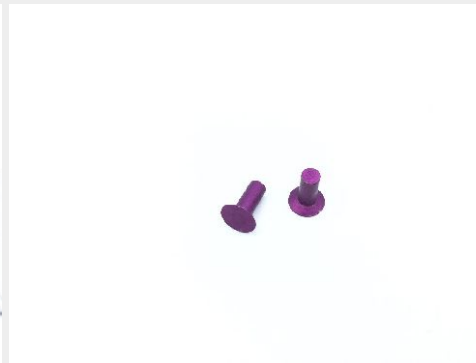

\* See page 2 for technical characteristics

## P/N AS2230-405 Specifications

<b>Fastener Length:</b>	0.312 Inches Nominal
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.121 Inches Minimum And 0.127 Inches Maximum
<b>Shank Style:</b>	Straight
<b>Head Major Diameter:</b>	0.244 Inches Minimum And 0.256 Inches Maximum
<b>Countersink Angle:</b>	119.0 Degrees Minimum And 121.0 Degrees Maximum
<b>Material:</b>	Aluminum Alloy Overall
<b>Surface Treatment:</b>	Anodize Overall

## How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/AS2230-405> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.