

**Description**

High temp, fluid resistant, very low compression set, fluorocarbon rubber ring, preformed packing, AS3209 series o-ring.


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

M83248/1-017

SKU / Model:	AS3209017
Minimum Qty (MOQ):	50
NSN:	5331-00-005-0799
Schedule B:	4016.99.6050
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

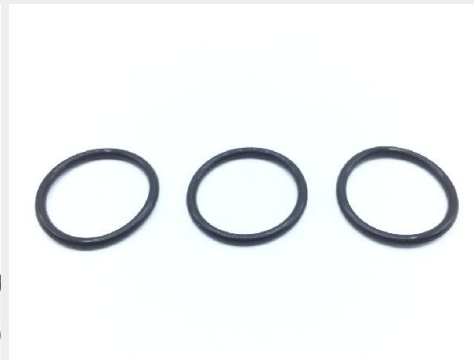

\* See page 2 for technical characteristics

## P/N AS3209-017 Specifications

<b>Outside Diameter:</b>	0.816 Inches Nominal
<b>Temp Rating:</b>	-20.0 Deg Fahrenheit And 400.0 Deg Fahrenheit
<b>Cross-sectional Height:</b>	0.067 Inches Minimum And 0.073 Inches Maximum
<b>Center Hole Diameter:</b>	0.671 Inches Minimum And 0.681 Inches Maximum
<b>Elongation Percentage:</b>	125 Maximum
<b>Hardness Rating:</b>	75.0 Shore Durometer A Nominal
<b>Material:</b>	Rubber Synthetic

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/AS3209-017](https://military-fasteners.com/o_rings/o_rings/AS3209-017) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.