

Description

High temp, fluid resistant, very low compression set, fluorocarbon rubber ring, preformed packing, AS3209 series o-ring.


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[M83248/1-017](#)

SKU / Model:	AS3209017
Minimum Qty (MOQ):	50
NSN:	5331-00-005-0799
Schedule B:	4016.99.6050
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

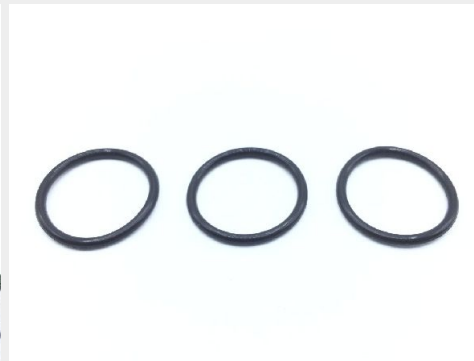

* See page 2 for technical characteristics

P/N AS3209-017 Specifications

Outside Diameter:	0.816 Inches Nominal
Temp Rating:	-20.0 Deg Fahrenheit And 400.0 Deg Fahrenheit
Cross-sectional Height:	0.067 Inches Minimum And 0.073 Inches Maximum
Center Hole Diameter:	0.671 Inches Minimum And 0.681 Inches Maximum
Elongation Percentage:	125 Maximum
Hardness Rating:	75.0 Shore Durometer A Nominal
Material:	Rubber Synthetic

How to Order

Order this o-ring from our inventory online by visiting https://military-fasteners.com/o_rings/o_rings/AS3209-017 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.