

Description

high temp, fluid resistant, very low compression set, fluorocarbon rubber ring


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[M83248/1-143](#)

| | |
|-------------------------|---|
| SKU / Model: | AS3209143 |
| Minimum Qty (MOQ): | 25 |
| NSN: | 5331-00-167-5125 |
| ECCN: | EAR99 |
| National Motor Freight: | 194120, Washers / Gaskets / Pckg Dvcs Noi |

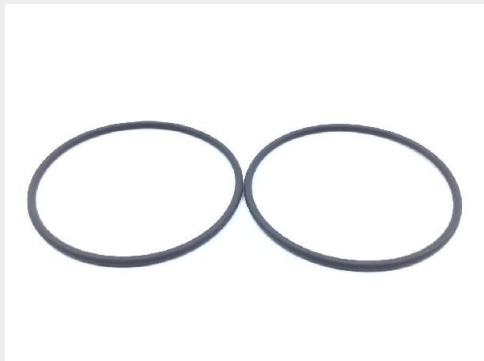

* See page 2 for technical characteristics

P/N AS3209-143 Specifications

| | |
|--|---|
| Outside Diameter: | 2.605 Inches Minimum And 2.657 Inches Maximum |
| Temp Rating: | -15.0 Deg Fahrenheit And 400.0 Deg Fahrenheit |
| Cross-sectional Height: | 0.100 Inches Minimum And 0.106 Inches Maximum |
| Center Hole Diameter: | 2.405 Inches Minimum And 2.445 Inches Maximum |
| Elongation Percentage: | 125 Maximum |
| Hardness Rating: | 75.0 Shore Durometer A Nominal |
| Material: | Rubber Fluorocarbon Class Fpm |
| Material Document And Classification: | Ams7276 Assn Std Single Material Response |

How to Order

Order this o-ring from our inventory online by visiting https://military-fasteners.com/o_rings/o_rings/AS3209-143 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.