

**Description**


fuel and low temperature resistant, nitrile, supersedes MS9021, AS3578 series oring

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	AS3578905
Minimum Qty (MOQ):	50
NSN:	5331-00-527-5997
Schedule B:	4016.93.5010
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

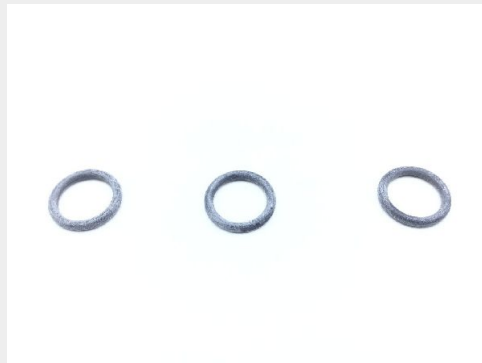

\* See page 2 for technical characteristics

## P/N AS3578-905 Specifications

<b>Outside Diameter:</b>	0.558 Inches Nominal
<b>Temp Rating:</b>	-65.0 Deg Fahrenheit And 200.0 Deg Fahrenheit
<b>Cross-sectional Height:</b>	0.069 Inches Minimum And 0.075 Inches Maximum
<b>Center Hole Diameter:</b>	0.409 Inches Minimum And 0.419 Inches Maximum
<b>Elongation Percentage:</b>	200 Maximum
<b>Hardness Rating:</b>	65.0 Shore Durometer A Nominal
<b>Material:</b>	Rubber Butadiene-acrylonitrile Class Nbr

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/AS3578-905](https://military-fasteners.com/o_rings/o_rings/AS3578-905) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.