



★ FASTENERS

Military-Fasteners.com

P/N AS5169D02

Description

outer diameter: 1/8", thread: 5/16-24, aluminum, AS5169 series fitting

* Manufacturer certifications are shipped with your order FREE of charge


Order this part online

Additional Information

Alternate Part Numbers

[AN814-2D](#)

SKU / Model:	AS5169D02
Minimum Qty (MOQ):	5
NSN:	5365-00-585-6324
Schedule B:	7616.10.1000
ECCN:	9A991
National Motor Freight:	013120, Aluminum Article Noi Sub 6

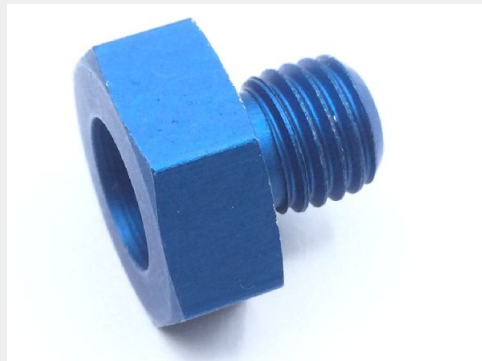

* See page 2 for technical characteristics

P/N AS5169D02 Specifications

Thread Class:	3a External
Thread Direction:	Right-hand External
Thread Length:	0.249 Inches Nominal External
Head Height:	0.234 Inches Nominal
Overall Length:	0.546 Inches Nominal
Connection Style:	Plain
Body Core Diameter:	0.062 Inches Nominal
Core Depth:	0.265 Inches Nominal
Bleeder Hole Center To Threaded End Distance:	0.156 Inches Nominal
Bleeder Hole Diameter:	0.062 Inches Nominal
Nominal Thread Size:	0.312 Inches External
Material:	Aluminum Alloy 7075 Overall Or Aluminum Alloy 2014 Overall
Material Document And Classification:	Qq-a-268,t6 Fed Spec 1st Material Response Overall Or Qq-a-268,t851 Fed Spec 1st Material Response Overall Or Qq-a-266 Fed Spec 2nd Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,ty 2 Mil Spec Single Treatment Response Overall
Style Designator:	Plug, Machine W/bleeder Holes
Thread Series Designator:	Unf External

How to Order

Order this machine thread plug from our inventory online by visiting <https://military-fasteners.com/fittings/machine+thread+plugs/AS5169D02> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.