


Description

Fastener Length: 3/16

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information****Alternate Part Numbers**[MS20426AD3-3](#)

SKU / Model:	BACR15BA3AD3C
Minimum Qty (MOQ):	100
NSN:	5320-01-537-2393
Schedule B:	7616.10.3000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

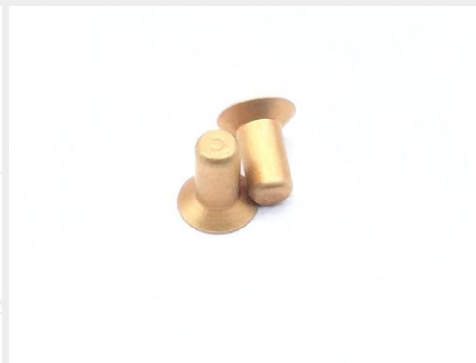

* See page 2 for technical characteristics

P/N BACR15BA3AD3C Specifications

Identification Code Color:	Natural
Fastener Length:	0.178 Inches Minimum And 0.198 Inches Maximum
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.0938 Inches Minimum And 0.0963 Inches Maximum
Shank Style:	Straight W/radius Chamfered Tip
Head Major Diameter:	0.184 Inches Maximum
End Item Identification:	C-135ccab
Shear Strength:	26000 Single Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Heat Treatment:	T-4 Solution Heat Treated Overall
Material:	Aluminum Alloy 2117 Overall
Material Document And Classification:	Qq-a-430 Fed Spec Single Material Response Overall
Surface Treatment:	Phosphate Overall
Surface Treatment Document And Classification:	Mil-a-8625 Type 2 Mil Spec Single Treatment Response Overall

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/BACR15BA3AD3C> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.