



★ FASTENERS

Military-Fasteners.com

P/N BACR15DP5AD6

Description



Fastener Length: 3/8, roughly 1220 pieces per pound

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	BACR15DP5AD6
Minimum Qty (MOQ):	100
NSN:	5320-00-598-0708
Schedule B:	7616.10.3000
ECCN:	EAR99
National Motor Freight:	013630, Alum Rivets

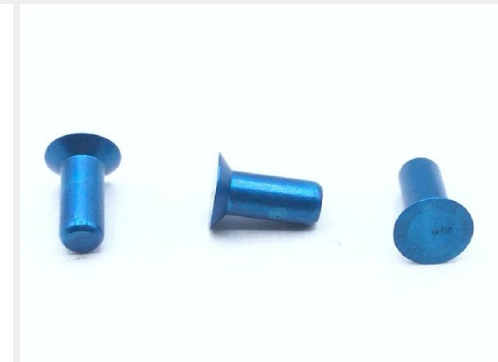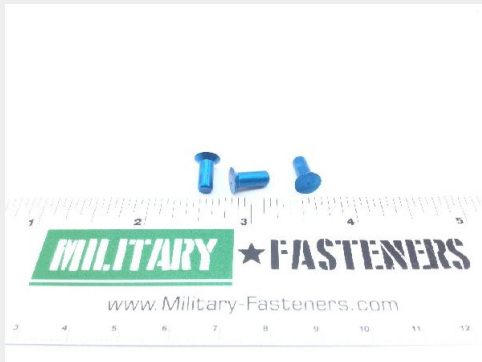

* See page 2 for technical characteristics

P/N BACR15DP5AD6 Specifications

Fastener Length:	0.365 Inches Minimum And 0.385 Inches Maximum
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Head Height:	0.055 Inches Nominal
Shank Diameter:	0.155 Inches Minimum And 0.159 Inches Maximum
Shank Style:	Straight With Tapered Tip
Head Major Diameter:	0.276 Inches Minimum And 0.284 Inches Maximum
Chamfer Length:	0.039 Inches Nominal
Countersink Angle:	100.0 Degrees Nominal
Material:	Aluminum Alloy 2117 Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,type 2 Mil Spec Single Treatment Response Overall

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/BACR15DP5AD6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.