

**Description**


Fastener Length: 3/8, roughly 1220 pieces per pound

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	BACR15DP5AD6
Minimum Qty (MOQ):	100
NSN:	5320-00-598-0708
Schedule B:	7616.10.3000
ECCN:	EAR99
National Motor Freight:	013630, Alum Rivets

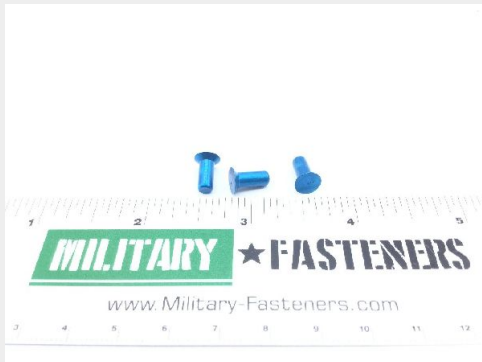

## P/N BACR15DP5AD6 Specifications

<b>Fastener Length:</b>	0.365 Inches Minimum And 0.385 Inches Maximum
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Head Height:</b>	0.055 Inches Nominal
<b>Shank Diameter:</b>	0.155 Inches Minimum And 0.159 Inches Maximum
<b>Shank Style:</b>	Straight With Tapered Tip
<b>Head Major Diameter:</b>	0.276 Inches Minimum And 0.284 Inches Maximum
<b>Chamfer Length:</b>	0.039 Inches Nominal
<b>Countersink Angle:</b>	100.0 Degrees Nominal
<b>Material:</b>	Aluminum Alloy 2117 Overall
<b>Surface Treatment:</b>	Anodize Overall
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625,type 2 Mil Spec Single Treatment Response Overall

## How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/BACR15DP5AD6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.