

**Description**

diameter: 3/32", grip range: 0.438" - 0.50", flush head, steel, CCR264 series rivet


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[CCR264SS3-8](#)

SKU / Model:	CCR264SS308
Minimum Qty (MOQ):	100
NSN:	5320-01-622-6568
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

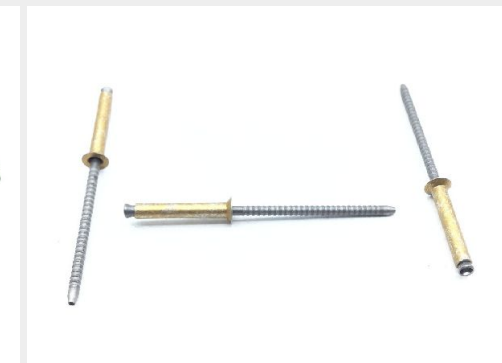

\* See page 2 for technical characteristics

## P/N CCR264SS3-08 Specifications

<b>Fastener Length:</b>	0.578 Inches Maximum
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.092 Inches Minimum And 0.097 Inches Maximum
<b>Shank Style:</b>	Pull Through Hollow Shank
<b>Head Major Diameter:</b>	0.175 Inches Minimum And 0.183 Inches Maximum
<b>End Item Identification:</b>	A-10 Wrp
<b>Grip Length:</b>	0.438 Inches Minimum And 0.500 Inches Maximum
<b>Countersink Angle:</b>	99.0 Degrees Minimum And 101.0 Degrees Maximum
<b>Material:</b>	Steel Comp 1018 Sleeve
<b>Material:</b>	Steel Stem
<b>Surface Treatment:</b>	Cadmium And Chromate Sleeve

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/CCR264SS3-08> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.