

Description


tube size: 3/16, thread: 3/8-24, threaded plastic cap for flared fittings

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|-----------------------|
| SKU / Model: | CD3 |
| Minimum Qty (MOQ): | 50 |
| NSN: | 5340-00-515-0525 |
| ECCN: | EAR99 |
| National Motor Freight: | 095190, Hardware, Noi |

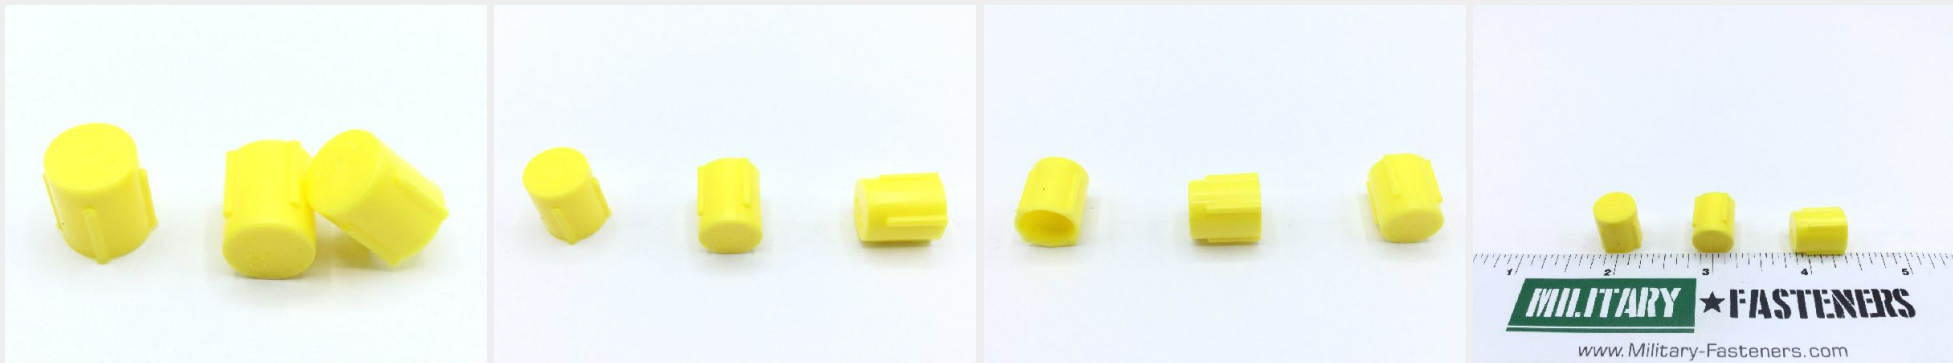

* See page 2 for technical characteristics

P/N CD-3 Specifications

| | |
|--|--|
| Thread Class: | 2b |
| Overall Diameter: | 0.500 Inches Nominal |
| End Item Identification: | W/s: L.p. Compressors; Helicopter, Advance Attack, Ah-1w; Air Compressors, High Pressure; Fire Pumps; Engine, Aircraft, F100-pw-100 (f-15a/b/c/d); Tractor, Aircraft Towing, A/s32u-30; Helicopter, Mh-53e; Aircraft, C-2a (reprocured); Engine, T700-ge-701 (ah-64) |
| Design Type: | Threaded |
| Inside Diameter Length: | 0.438 Inches Nominal |
| Round Cap Outside Surface Condition: | Serrated |
| Material: | Plastic |
| Thread Size And Series/type Designator: | 3/8-24 Unf |

How to Order

Order this protective dust and moisture cap from our inventory online by visiting <https://military-fasteners.com/caplug/protective+dust+and+moisture+caps/CD-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.