

P/N CSR902B-4-5

Military-Fasteners.com

### Description

flush flat head, titanium alloy


\* Manufacturer certifications are shipped with your order  $\underline{\mathsf{FREE}}$  of charge

## Order this part online

### **Additional Information**

#### **Alternate Part Numbers**

<u>CSR902B4-5</u>	
SKU / Model:	CSR902B45
Minimum Qty (MOQ):	100
NSN:	5320-00-162-7248
ECCN:	EAR99
National Motor Freight:	136500, Metal Noi / Metal Alloys Noi

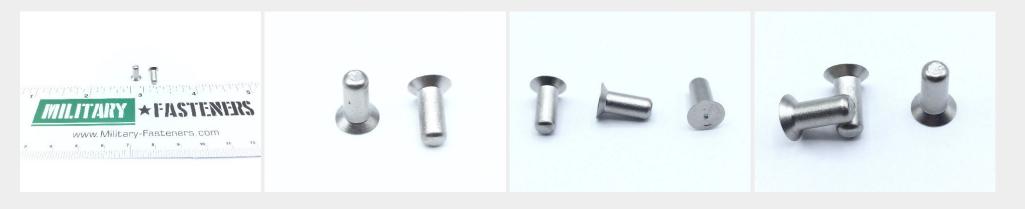

# P/N CSR902B-4-5 Specifications

Fastener Length:	0.302 Inches Minimum And 0.322 Inches Maximum
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.124 Inches Minimum And 0.128 Inches Maximum
Shank Style:	Straight
Head Major Diameter:	0.207 Inches Minimum And 0.229 Inches Maximum
Shear Strength:	50000 Single Pounds Per Square Inch
Countersink Angle:	98.5 Degrees Minimum And 101.5 Degrees Maximum
Material:	Titanium Alloy Overall
Material Document And Classification:	-172,fscm 11815 Mfr Ref Single Material Response Overall

# How to Order

Order this solid rivet from our inventory online by visiting <u>https://military-fasteners.com/rivets/solid+rivets/CSR902B-4-5</u> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out <u>here</u> to complete your order.