

Description


Diameter: 7/32", Grip Length: 3/16", protruding shear head, oversized for hl18, alloy steel cadmium plated

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | HL21863 |
| Minimum Qty (MOQ): | 25 |
| NSN: | 5306-00-522-1813 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

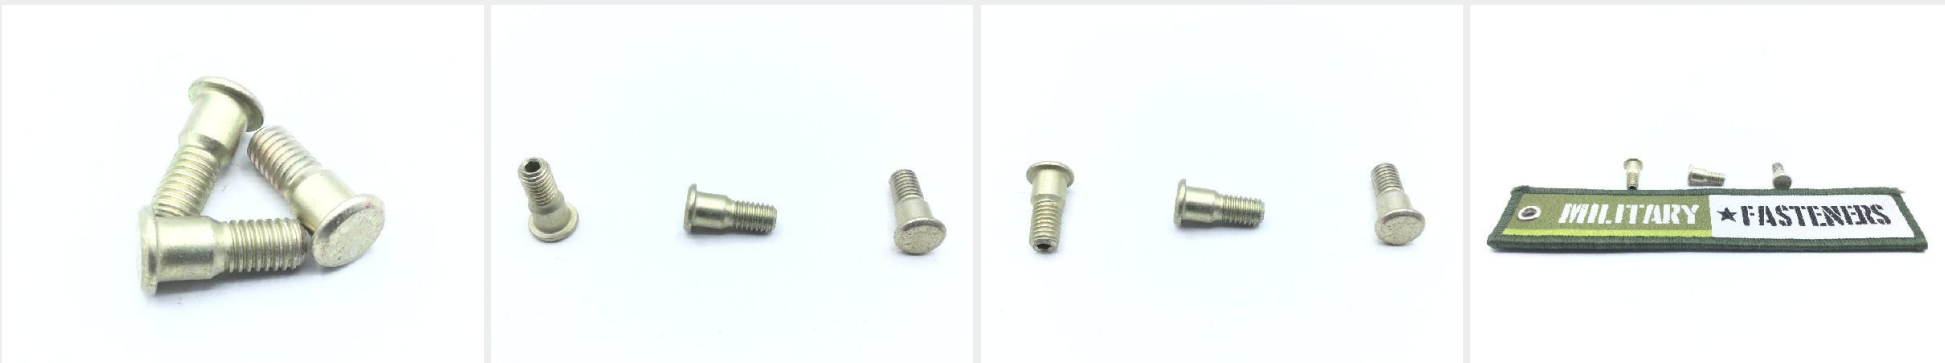

* See page 2 for technical characteristics

P/N HL218-6-3 Specifications

| | |
|--|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.325 Inches Minimum |
| Fastener Length: | 0.503 Inches Minimum And 0.523 Inches Maximum |
| Head Style: | Flat Chamfer |
| Head Diameter: | 0.295 Inches Minimum And 0.315 Inches Maximum |
| Head Height: | 0.045 Inches Minimum And 0.055 Inches Maximum |
| Shoulder Diameter: | 0.217 Inches Minimum First Shoulder And 0.218 Inches Maximum First Shoulder |
| Shoulder Length: | 0.178 Inches Minimum First Shoulder And 0.198 Inches Maximum First Shoulder |
| Nominal Thread Diameter: | 0.190 Inches |
| Thread Quantity Per Inch: | 32 |
| Hardness Rating: | 35.0 Rockwell C Nominal Overall |
| Shoulder Shape: | Round First Shoulder |
| Material: | Steel Comp 4130 Overall Or Steel Comp 8630 Overall Or Steel Comp 8735 Overall Or Steel Comp 8740 Overall |
| Material Document And Classification: | Mil-s-6758 Mil Spec 1st Material Response Overall Or Mil-s-6050 Mil Spec 2nd Material Response Overall Or Mil-s-6098 Mil Spec 3rd Material Response Overall Or Mil-s-6049 Mil Spec 4th Material Response Overall |
| Surface Treatment: | Cadmium Overall |
| Thread Series Designator: | Unjf |

How to Order

Order this pin-rievet from our inventory online by visiting https://military-fasteners.com/pins/pin_rivets/HL218-6-3 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.