

**Description**

Shear application, 2024-t6 aluminum alloy, red anodized, HL70 series collar. The standard collar is tamper proof because it cannot be removed without the use of special tools.


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[HL706](#) [DAN11-6](#)

SKU / Model:	HL706
Minimum Qty (MOQ):	10
NSN:	5320-00-631-3429
Schedule B:	7616.10.9090
ECCN:	EAR99
National Motor Freight:	013630, Alum Rivets

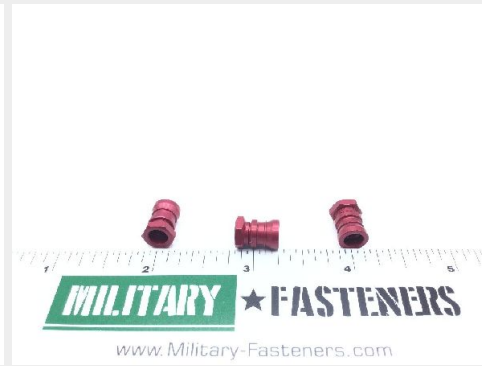

## P/N HL70-6 Specifications

<b>Thread Class:</b>	3b
<b>Thread Direction:</b>	Right-hand
<b>Identification Code Color:</b>	Red
<b>Collar Outside Diameter:</b>	0.303 Inches Minimum And 0.307 Inches Maximum
<b>Collar Overall Height:</b>	0.437 Inches Minimum And 0.457 Inches Maximum
<b>Lubrication:</b>	Cetyl Alcohol
<b>Collar Inside Diameter:</b>	0.188 Inches Nominal
<b>Thread Quantity Per Inch:</b>	32
<b>Nominal Thread Size:</b>	0.190 Inches
<b>Collar Style:</b>	Threaded (break Off) Type
<b>Heat Treatment:</b>	T-6 Solution Heat Treated Overall
<b>Material:</b>	Aluminum Alloy 2024 Overall
<b>Surface Treatment:</b>	Anodize Overall
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625 Mil Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unjf

## How to Order

Order this pin-rievet collar from our inventory online by visiting [https://military-fasteners.com/collars/pin\\_rievet+collars/HL70-6](https://military-fasteners.com/collars/pin_rievet+collars/HL70-6) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.