

Description

Shear application, 2024-t6 aluminum alloy, red anodized, HL70 series collar. The standard collar is tamper proof because it cannot be removed without the use of special tools.

\* Manufacturer certifications are shipped with your order FREE of charge


Order this part online

Additional Information

Alternate Part Numbers

[HL706](#) [DAN11-6](#)

SKU / Model:	HL706
Minimum Qty (MOQ):	10
NSN:	5320-00-631-3429
Schedule B:	7616.10.9090
ECCN:	EAR99
National Motor Freight:	013630, Alum Rivets

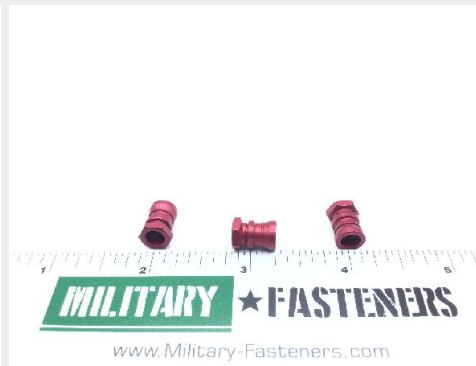

\* See page 2 for technical characteristics

# P/N HL70-6 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Identification Code Color:	Red
Collar Outside Diameter:	0.303 Inches Minimum And 0.307 Inches Maximum
Collar Overall Height:	0.437 Inches Minimum And 0.457 Inches Maximum
Lubrication:	Cetyl Alcohol
Collar Inside Diameter:	0.188 Inches Nominal
Thread Quantity Per Inch:	32
Nominal Thread Size:	0.190 Inches
Collar Style:	Threaded (break Off) Type
Heat Treatment:	T-6 Solution Heat Treated Overall
Material:	Aluminum Alloy 2024 Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec Single Treatment Response Overall
Thread Series Designator:	Unjf

## How to Order

Order this pin-rivet collar from our inventory online by visiting [https://military-fasteners.com/collars/pin\\_rivet+collars/HL70-6](https://military-fasteners.com/collars/pin_rivet+collars/HL70-6) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.