



[Military-Fasteners.com](http://Military-Fasteners.com)

**P/N HL79-6**

## Description

shear application, aluminum alloy, anodized, red color, HL79 series collar, the standard collar is tamper proof because it cannot be removed without the use of special tools.

\* Manufacturer certifications are shipped with your order FREE of charge



Order this part online

## Additional Information

### Alternate Part Numbers

[BACC30M6](#)

SKU / Model:	HL796
Minimum Qty (MOQ):	5
NSN:	5320-00-968-9212
Schedule B:	8803.30.0010
ECCN:	EAR99
National Motor Freight:	013630, Alum Rivets

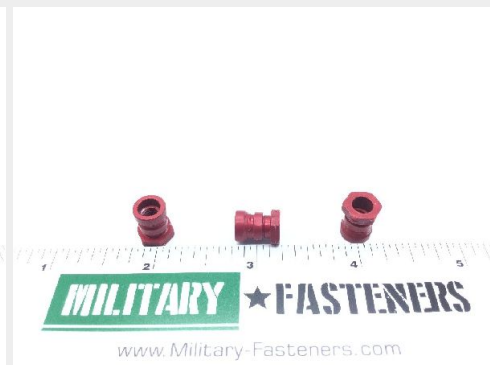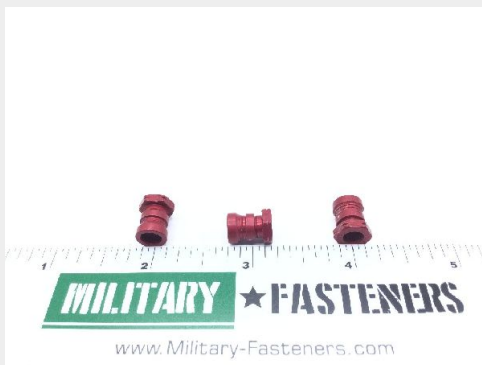

# P/N HL79-6 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Identification Code Color:	Red
Collar Outside Diameter:	0.318 Inches Minimum And 0.322 Inches Maximum
Collar Overall Height:	0.437 Inches Minimum And 0.457 Inches Maximum
Lubrication:	Cetyl Alcohol, Spec 305, Hi-shear Corp
Collar Inside Diameter:	0.208 Inches Minimum And 0.212 Inches Maximum
Thread Quantity Per Inch:	32
Nominal Thread Size:	0.190 Inches
Collar Style:	Threaded (break Off) Type
Heat Treatment:	T-6 Solution Heat Treated Overall
Material:	Aluminum Alloy 2024 Overall
Material Document And Classification:	Qq-a-430 Fed Spec Single Material Response Overall Or Qq-a-225/6 Fed Spec Single Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec Single Treatment Response Overall
Thread Series Designator:	Unjf

## How to Order

Order this pin-rivet collar from our inventory online by visiting [https://military-fasteners.com/collars/pin\\_rivet+collars/HL79-6](https://military-fasteners.com/collars/pin_rivet+collars/HL79-6) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.