

Description


Thread Size: 1/4", Head Width: 1/4", locknut, KFN542 series nut

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	KFN5424
Minimum Qty (MOQ):	10
NSN:	5310-01-111-6517
Schedule B:	7318.16.0085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

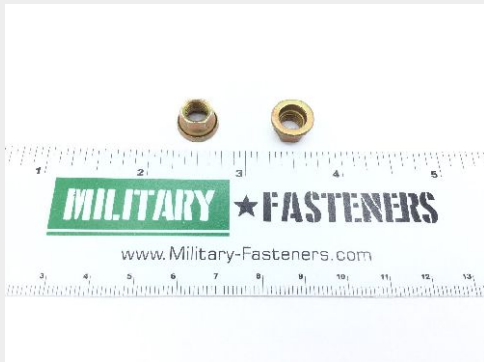

* See page 2 for technical characteristics

P/N KFN542-4 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Locking Feature:	Prevailing Torque All Metal Design
Washer Outside Diameter:	0.460 Inches Maximum
Counterbore Diameter:	0.283 Inches Minimum Nut And 0.288 Inches Maximum Nut
Overall Height:	0.280 Inches Maximum
Nut Style:	Flat With Turned Up Edge
Nut Counterbore Depth:	0.087 Inches Minimum Nut And 0.097 Inches Maximum Nut
Width Across Flats:	0.306 Inches Minimum And 0.313 Inches Maximum
Temp Rating:	450.0 Deg Fahrenheit Maximum
Thread Series:	Unjf
Thread Quantity Per Inch:	28
Hardness Rating:	39.0 Rockwell C Minimum And 43.0 Rockwell C Maximum
Nominal Thread Size:	0.250 Inches
Special Features:	Washer Rockwell C Scale 40.0 Min And 45.0 Max
Material:	Steel Comp E4340 Nut Or Steel Comp 4140 Nut Or Steel Comp 8740 Nutsteel Washer
Material Document And Classification:	Mil-s-5000 Mil Spec 1st Material Response Nut Or Mil-s-5626 Mil Spec 2nd Material Response Nut Or Mil-s-6049 Mil Spec 3rd Material Response Nut
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Overall

How to Order

Order this self-locking assembled washer nut from our inventory online by visiting https://military-fasteners.com/nuts/self_locking+assembled+washer+nuts/KFN542-4 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.