

Description

Thread: 10-32, castellated, self locking, lightweight, cadmium plated, dry film lubricant, MS14144 series nut


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[PHCR353M](#)

SKU / Model:	MS14144L3
Minimum Qty (MOQ):	10
NSN:	5310-01-057-3110
Schedule B:	7318.16.0000
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

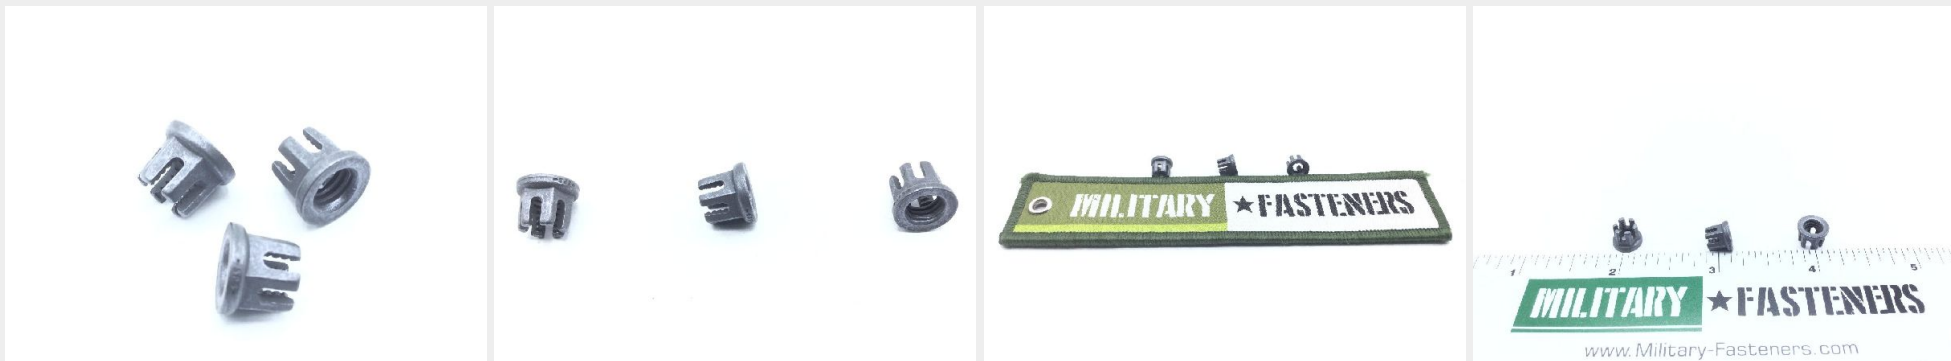

* See page 2 for technical characteristics

P/N MS14144L3 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Locking Feature:	Prevailing Torque All Metal Design
Washer Outside Diameter:	0.325 Inches Maximum
Lubrication:	Dry Film Lubricant
Overall Height:	0.235 Inches Minimum And 0.265 Inches Maximum
Nut Style:	Slotted Hexagon
Washer Thickness:	0.025 Inches Nominal
Width Across Flats:	0.243 Inches Minimum And 0.252 Inches Maximum
Temp Rating:	450.0 Deg Fahrenheit Maximum
Thread Series:	Unjf
Thread Quantity Per Inch:	32
Nominal Thread Size:	0.190 Inches
Bearing Surface Finish:	125.0 Microinches
Material:	Steel Overall
Surface Treatment:	Cadmium Overall
Surface Treatment Document And Classification:	Qq-p-416 Fed Spec Single Treatment Response Overall

How to Order

Order this self-locking extended washer nut from our inventory online by visiting https://military-fasteners.com/nuts/self_locking+extended+washer+nuts/MS14144L3 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.