

Description


Fastener Length: 59/64", Thread: 10-32, Thread Length: 27/64

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|--------------------|------------------|
| SKU / Model: | MS1418103010L |
| Minimum Qty (MOQ): | 1 |
| NSN: | 5306-01-490-2297 |
| Schedule B: | 7508.90.5000 |
| ECCN: | EAR99 |

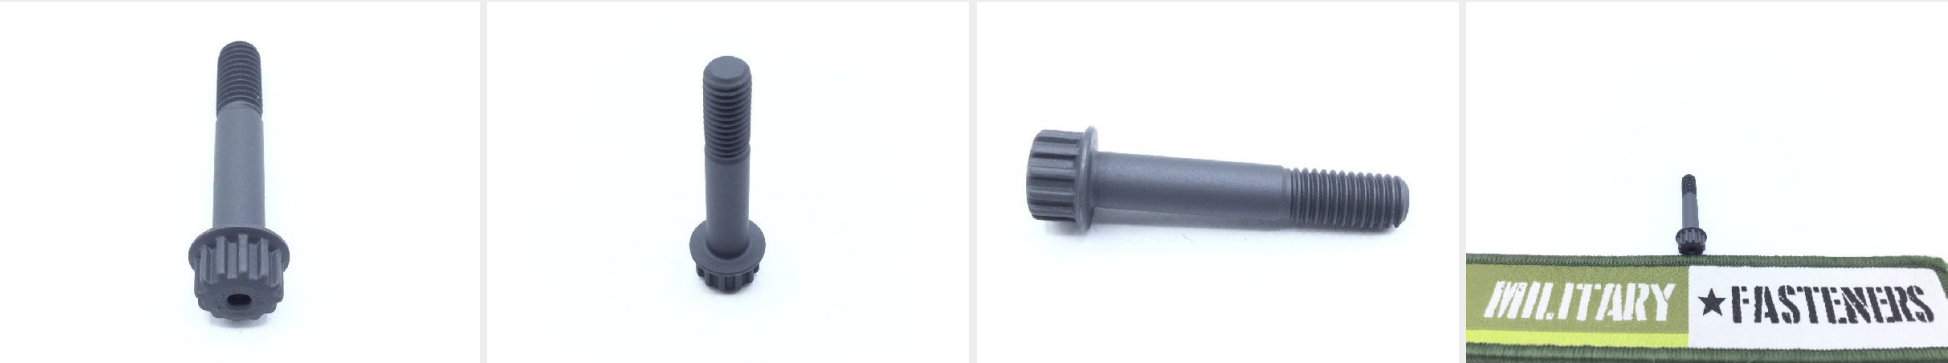

* See page 2 for technical characteristics

P/N MS14181-03010L Specifications

| | |
|--|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.408 Inches Nominal |
| Fastener Length: | 0.918 Inches Minimum And 0.948 Inches Maximum |
| Head Style: | Spline Extended Washer |
| Head Height: | 0.195 Inches Minimum And 0.215 Inches Maximum |
| Extended Washer Diameter: | 0.349 Inches Minimum And 0.359 Inches Maximum |
| Extended Washer Thickness: | 0.017 Inches Minimum And 0.037 Inches Maximum |
| Grip Diameter: | 0.1885 Inches Minimum And 0.1895 Inches Maximum |
| Head Minor Diameter: | 0.173 Inches Minimum And 0.188 Inches Maximum |
| End Item Identification: | F-22 |
| Nominal Thread Diameter: | 0.190 Inches |
| Grip Length: | 0.490 Inches Minimum And 0.510 Inches Maximum |
| Thread Quantity Per Inch: | 32 |
| Minimum Tensile Strength: | 22000 Pounds Per Square Inch |
| Special Features: | Dry Film Lubricant Per Mil-I-46010, Type I |
| Material: | Nickel Alloy 718 Overall |
| Material Document And Classification: | Ams5662 Assn Std Single Material Response Overall Or Ams5663 Assn Std Single Material Response Overall |
| Thread Series Designator: | Unjf |

How to Order

Order this machine bolt from our inventory online by visiting <https://military-fasteners.com/bolts/machine+bolts/MS14181-03010L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.