



★ FASTENERS

[Military-Fasteners.com](http://Military-Fasteners.com)

**P/N MS16535-23**

## Description


MS16535-23 Tubular Rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	MS1653523
Minimum Qty (MOQ):	100
NSN:	5320-00-821-4996
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

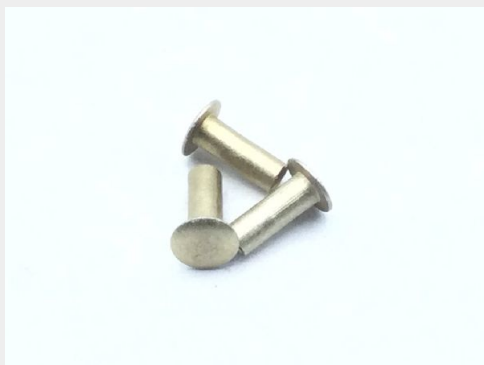

\* See page 2 for technical characteristics

## P/N MS16535-23 Specifications

<b>Fastener Length:</b>	0.181 Inches Minimum And 0.195 Inches Maximum
<b>Head Style:</b>	Oval/truss
<b>Head Height:</b>	0.015 Inches Minimum And 0.019 Inches Maximum
<b>Hole Diameter:</b>	0.039 Inches Minimum And 0.043 Inches Maximum
<b>Shank Diameter:</b>	0.058 Inches Minimum And 0.061 Inches Maximum
<b>Shank Style:</b>	Tubular
<b>Head Major Diameter:</b>	0.104 Inches Minimum And 0.114 Inches Maximum
<b>Hole Depth:</b>	0.031 Inches Minimum And 0.062 Inches Maximum
<b>Shear Strength:</b>	26000 Double Pounds Per Square Inch
<b>Material:</b>	Aluminum Alloy 2117 Overall
<b>Material Document And Classification:</b>	Mil-w-7986 Mil Spec Single Material Response Overall
<b>Surface Treatment:</b>	Chromate Overall

## How to Order

Order this tubular rivet from our inventory online by visiting <https://military-fasteners.com/rivets/tubular+rivets/MS16535-23> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.