

Description


MS16535-23 Tubular Rivet

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS1653523
Minimum Qty (MOQ):	100
NSN:	5320-00-821-4996
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

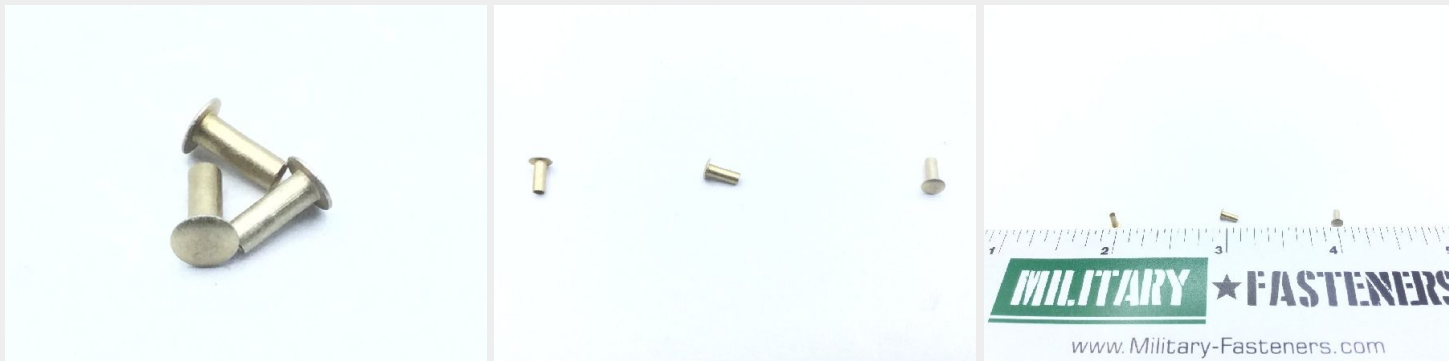

* See page 2 for technical characteristics

P/N MS16535-23 Specifications

Fastener Length:	0.181 Inches Minimum And 0.195 Inches Maximum
Head Style:	Oval/truss
Head Height:	0.015 Inches Minimum And 0.019 Inches Maximum
Hole Diameter:	0.039 Inches Minimum And 0.043 Inches Maximum
Shank Diameter:	0.058 Inches Minimum And 0.061 Inches Maximum
Shank Style:	Tubular
Head Major Diameter:	0.104 Inches Minimum And 0.114 Inches Maximum
Hole Depth:	0.031 Inches Minimum And 0.062 Inches Maximum
Shear Strength:	26000 Double Pounds Per Square Inch
Material:	Aluminum Alloy 2117 Overall
Material Document And Classification:	Mil-w-7986 Mil Spec Single Material Response Overall
Surface Treatment:	Chromate Overall

How to Order

Order this tubular rivet from our inventory online by visiting <https://military-fasteners.com/rivets/tubular+rivets/MS16535-23> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.