

**Description**


length: 3/8", diameter: 1/16", tubular, slotted, corrosion resistant steel, MS16562 series pin

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS16562192
Minimum Qty (MOQ):	50
NSN:	5315-00-823-8740
Schedule B:	7318.24.0000
ECCN:	EAR99
National Motor Freight:	095190, Hardware, Noi Sub 9

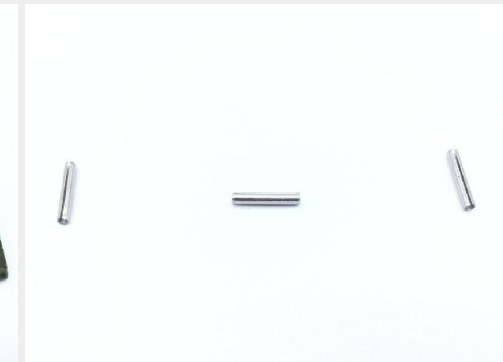

\* See page 2 for technical characteristics

## P/N MS16562-192 Specifications

<b>Overall Length:</b>	0.360 Inches Minimum And 0.390 Inches Maximum
<b>Diameter:</b>	0.066 Inches Minimum And 0.069 Inches Maximum
<b>Material Thickness:</b>	0.012 Inches Minimum
<b>Hardness Rating:</b>	43.0 Rockwell C Minimum Overall And 52.0 Rockwell C Maximum Overall
<b>Shear Strength:</b>	425 Double Pound
<b>Surface Finish:</b>	80.0 Microinches Outside Diameter
<b>Material:</b>	Steel Comp 410 Overall Or Steel Comp 420 Overall
<b>Material Document And Classification:</b>	66 Fed Std All Material Responses Overall
<b>Surface Treatment:</b>	Passivate Overall
<b>Surface Treatment Document And Classification:</b>	Astm A380 Assn Std Single Treatment Response Overall
<b>Style Designator:</b>	Slotted

## How to Order

Order this spring pin from our inventory online by visiting <https://military-fasteners.com/pins/spring+pins/MS16562-192> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.