

Description


length: 3/4, diameter: 1/16", tubular, slotted, corrosion resistant steel, MS16562 series pin

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|-----------------------------|
| SKU / Model: | MS16562198 |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5315-00-584-0257 |
| Schedule B: | 7318.24.0000 |
| ECCN: | EAR99 |
| National Motor Freight: | 095190, Hardware, Noi Sub 9 |

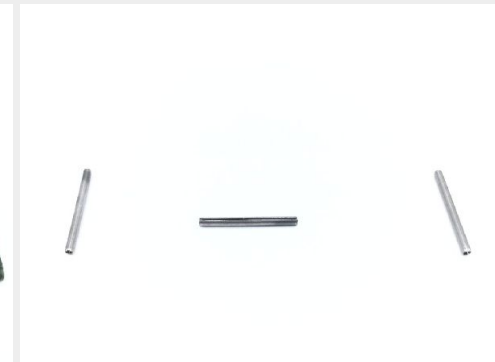

* See page 2 for technical characteristics

P/N MS16562-198 Specifications

| | |
|---|---|
| Overall Length: | 0.735 Inches Minimum And 0.765 Inches Maximum |
| Diameter: | 0.066 Inches Minimum And 0.069 Inches Maximum |
| Material Thickness: | 0.012 Inches Nominal |
| Hardness Rating: | 43.0 Rockwell C Minimum Overall And 52.0 Rockwell C Maximum Overall |
| Shear Strength: | 425 Double Pound |
| Surface Finish: | 80.0 Microinches Outside Diameter |
| Material: | Steel Comp 410 Overall Or Steel Comp 420 Overall |
| Material Document And Classification: | 66 Fed Std All Material Responses Overall |
| Surface Treatment: | Passivate Overall |
| Surface Treatment Document And Classification: | Astm A380 Assn Std Single Treatment Response Overall |
| Style Designator: | Slotted |

How to Order

Order this spring pin from our inventory online by visiting <https://military-fasteners.com/pins/spring+pins/MS16562-198> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.