

**Description**



length: 9/16", diameter: 3/32", tubular slotted, carbon steel

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS1656226
Minimum Qty (MOQ):	100
NSN:	5315-00-844-3958
ECCN:	EAR99
National Motor Freight:	094380, Cotter Pins / Spring Cotter Iron

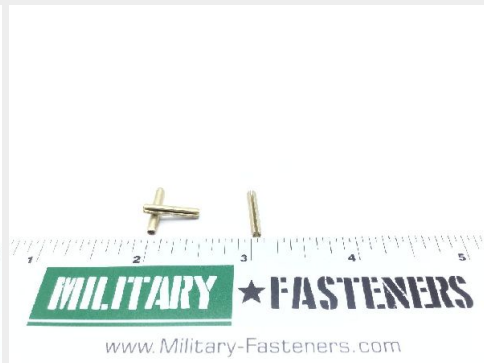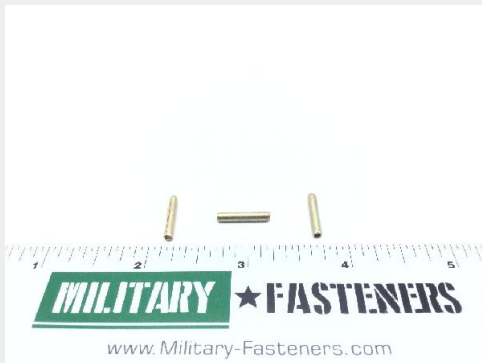

# P/N MS16562-26 Specifications

Overall Length:	0.547 Inches Minimum And 0.577 Inches Maximum
Diameter:	0.099 Inches Minimum And 0.103 Inches Maximum
Material Thickness:	0.022 Inches Nominal
Hardness Rating:	46.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall
Shear Strength:	1000 Double Pound
Material:	Steel Comp 1070 Overall Or Steel Comp 1074 Overall Or Steel Comp 1080 Overall Or Steel Comp 1086 Overall Or Steel Comp 1095 Overall
Material Document And Classification:	66 Fed Std Single Material Response Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416 Ty 2 Cl 2 Fed Spec Single Treatment Response Overall
Style Designator:	Slotted

## How to Order

Order this spring pin from our inventory online by visiting <https://military-fasteners.com/pins/spring+pins/MS16562-26> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.