

Description


length: 5/16", diameter: 1/16", tubular slotted, carbon steel, MS16562 series pin

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|------------------------------------|
| SKU / Model: | MS165623 |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5315-00-843-7988 |
| ECCN: | EAR99 |
| National Motor Freight: | 013120, Aluminum Article Noi Sub 6 |

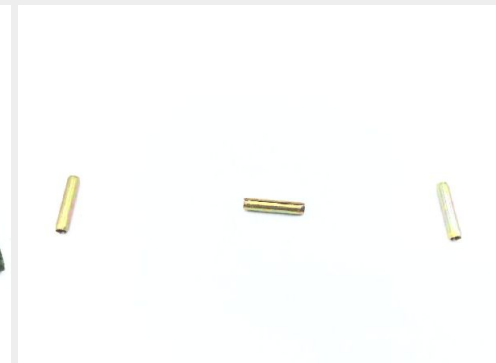

* See page 2 for technical characteristics

P/N MS16562-3 Specifications

| | |
|---|---|
| Overall Length: | 0.297 Inches Minimum And 0.327 Inches Maximum |
| Diameter: | 0.066 Inches Minimum And 0.069 Inches Maximum |
| Material Thickness: | 0.012 Inches Minimum |
| Hardness Rating: | 46.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall |
| Shear Strength: | 425 Double Pound |
| Material: | Steel Comp 1070 Overall Or Steel Comp 1074 Overall Or Steel Comp 1080 Overall Or Steel Comp 1086 Overall Or Steel Comp 1095 Overall |
| Material Document And Classification: | 66 Fed Std All Material Responses Overall |
| Surface Treatment: | Cadmium Overall And Chromate Overall |
| Surface Treatment Document And Classification: | Qq-p-416,ty2 Cl2 Fed Spec Single Treatment Response Overall |
| Style Designator: | Slotted |

How to Order

Order this spring pin from our inventory online by visiting <https://military-fasteners.com/pins/spring+pins/MS16562-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.