

Description


length: 1-1/4", diameter: 1/8", tubular slotted, carbon steel, MS16562 series pin

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS1656239
Minimum Qty (MOQ):	50
NSN:	5315-00-844-6796
Schedule B:	7318.24.0000
ECCN:	EAR99
National Motor Freight:	095190, Hardware, Noi Sub 9

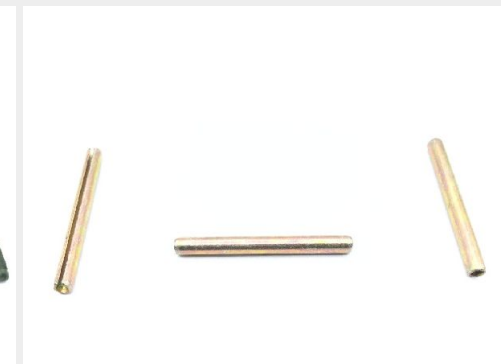

* See page 2 for technical characteristics

P/N MS16562-39 Specifications

Overall Length:	1.230 Inches Minimum And 1.270 Inches Maximum
Diameter:	0.131 Inches Minimum And 0.135 Inches Maximum
Material Thickness:	0.028 Inches Nominal
Hardness Rating:	46.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall
Shear Strength:	2100 Double Pound
Material:	Steel Comp 1070 Overall Or Steel Comp 1074 Overall Or Steel Comp 1080 Overall Or Steel Comp 1086 Overall Or Steel Comp 1095 Overall
Material Document And Classification:	66 Fed Std All Material Responses Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty2 Cl2 Fed Spec Single Treatment Response Overall
Style Designator:	Slotted

How to Order

Order this spring pin from our inventory online by visiting <https://military-fasteners.com/pins/spring+pins/MS16562-39> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.