



★ FASTENERS

Military-Fasteners.com

P/N MS16624-1066

## Description


For shaft size: 0.669", basic external cadmium plated steel, tapered section type, MS16624 series ring

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	MS166241066
Minimum Qty (MOQ):	50
NSN:	5325-00-282-1830
Schedule B:	7326.90.8688
ECCN:	EAR99
National Motor Freight:	063520, Waveguide In Boxes / Crates

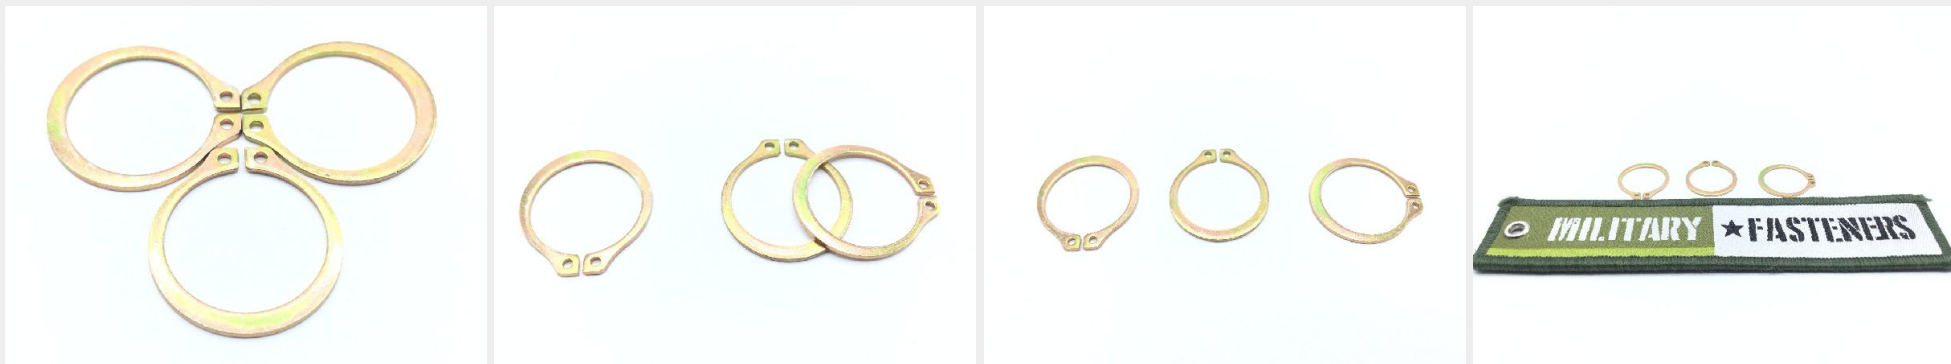

\* See page 2 for technical characteristics

# P/N MS16624-1066 Specifications

Cross-sectional Shape Style:	Rectangular
Inside Diameter:	0.611 Inches Minimum And 0.626 Inches Maximum
Casehardening Indicator:	Not Casehardened
Major Thickness:	0.033 Inches Minimum And 0.037 Inches Maximum
Ring Style:	External
Usage Design:	External
Material Hardness Rating:	66.0 Rockwell Superficial 30-n Minimum And 71.0 Rockwell Superficial 30-n Maximum
Material:	Steel,fed Std 66 Aisi 1066 Or 1069 Or 1070 Or 1072 Or 1074 Or 1075 Or 1078 Or 1080 Or 1084 Or 1086 Or 1090
Material:	Steel,fed Std 66 Aisi 1066 Or 1069 Or 1070 Or 1072 Or 1074 Or 1075 Or 1078 Or 1080 Or 1084 Or 1086 Or 1090
Surface Treatment:	Cadmium And Chromate Or Chromate Zinc
Surface Treatment:	Cadmium, Qq-p-416, Type 2, Class 3 Or Zinc Plated,mil-c-81562,ty 2 Cl 3

## How to Order

Order this retaining ring from our inventory online by visiting <https://military-fasteners.com/rings/retaining+rings/MS16624-1066> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.