

Description


Fastener Length: 1-1/2", Thread: 3/4-10, Head Width: 5/8", Thread Length: 1-1/2", MS16997 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS16997188L
Minimum Qty (MOQ):	1
NSN:	5305-01-432-1107
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

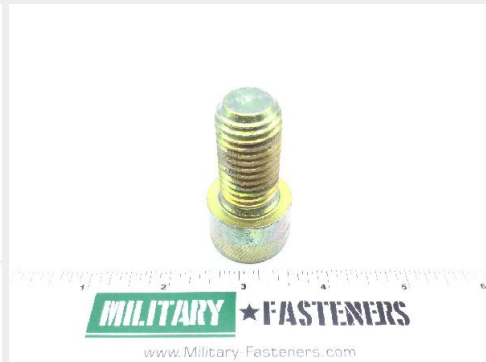

* See page 2 for technical characteristics

P/N MS16997-188L Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	1.500 Inches Maximum
Fastener Length:	1.440 Inches Minimum And 1.500 Inches Maximum
Head Style:	Flat Chamfer
Head Diameter:	1.107 Inches Minimum And 1.125 Inches Maximum
Head Height:	0.740 Inches Minimum And 0.750 Inches Maximum
Locking Feature:	Patch Threads Or Pellet Threads Or Strip Threads
Internal Drive Style:	Hexagon
Nominal Thread Diameter:	0.750 Inches
Width Across Flats:	0.625 Inches Minimum And 0.631 Inches Maximum
Thread Quantity Per Inch:	10
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Special Features:	Black Oxide Surface Treatment
Material:	Plastic Polyamide Locking Feature
Material:	Steel Uns K03104 Fastener
Material Document And Classification:	Astm A574 Assn Std Single Material Response Fastener
Surface Treatment:	Chromate Fastener And Cadmium Fastener
Surface Treatment:	Oxide Overall
Surface Treatment Document And Classification:	Qq-p-416,ty2cl2 Fed Spec Single Treatment Response Fastener Or Mil-c-815622 Mil Spec Single Treatment Response Fastener
Thread Series Designator:	Unrc

How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/MS16997-188L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.