

Description


length: 3/4", diameter: 1/8", corrosion resistant steel, MS1715 series pin

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS171530
Minimum Qty (MOQ):	100
NSN:	5315-01-049-1773
Schedule B:	7318.24.0000
ECCN:	EAR99
National Motor Freight:	095190, Hardware, Noi

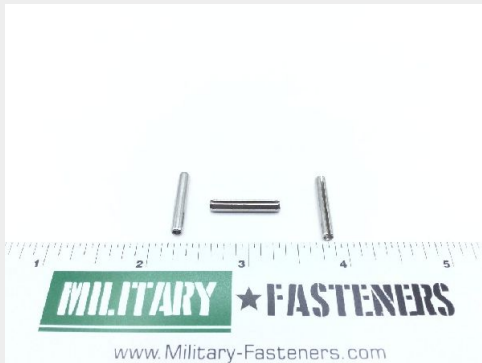

* See page 2 for technical characteristics

P/N MS171530 Specifications

Overall Length:	0.735 Inches Minimum And 0.765 Inches Maximum
Diameter:	0.131 Inches Minimum And 0.135 Inches Maximum
Material Thickness:	0.028 Inches Nominal
Hardness Rating:	83.0 Rockwell Superficial 15-n Minimum Overall And 87.0 Rockwell Superficial 15-n Maximum Overall
Shear Strength:	2100 Double Pounds Per Square Inch
Surface Finish:	80.0 Microinches Outside Diameter
Material:	Steel Comp 410 Overall
Material Document And Classification:	Ams 5506 Assn Std Single Material Response Overall
Surface Treatment:	Passivate Overall
Style Designator:	Slotted

How to Order

Order this spring pin from our inventory online by visiting <https://military-fasteners.com/pins/spring+pins/MS171530> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.