


**Description**

MS17986C418 Quick Release Pin

\* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information****Alternate Part Numbers**[MS17986-C418](#)

|                         |                             |
|-------------------------|-----------------------------|
| SKU / Model:            | MS17986C418                 |
| Minimum Qty (MOQ):      | 1                           |
| NSN:                    | 5315-00-481-6269            |
| ECCN:                   | EAR99                       |
| National Motor Freight: | 095190, Hardware, Noi Sub 9 |

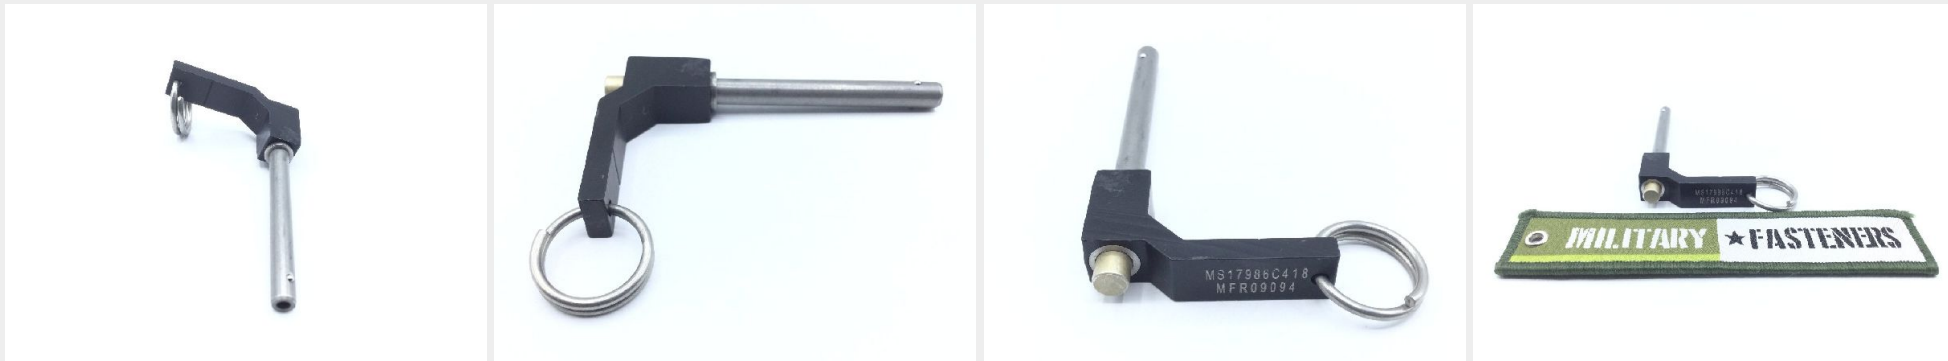

\* See page 2 for technical characteristics

## P/N MS17986C418 Specifications

|   |  |
|---|--|
| <b>Shank Diameter:</b>                                | 0.2470 Inches Minimum And 0.2485 Inches Maximum  |
| <b>Detent Quantity:</b>                               | 2  |
| <b>Actuation Method:</b>                              | Push Button  |
| <b>Grip Length:</b>                                   | 1.800 Inches Minimum And 1.820 Inches Maximum  |
| <b>Actuation Type:</b>                                | Push   |
| <b>Hardness Rating:</b>                               | 40.0 Rockwell C Minimum Shank  |
| <b>Hardness Rating:</b>                               | 40.0 Rockwell C Minimum Spindle  |
| <b>Shoulder To Head End Distance:</b>                 | 1.270 Inches Maximum   |
| <b>Pin Center To Handle End Distance:</b>             | 1.380 Inches Minimum And 1.460 Inches Maximum  |
| <b>Pin Attachment Type:</b>                           | Hook Or Ring   |
| <b>Detent To Tapered End Distance:</b>                | 0.260 Inches Minimum And 0.290 Inches Maximum  |
| <b>Material:</b>                                      | Steel Comp 630 Shank Or Steel Comp 632 Shank   |
| <b>Material:</b>                                      | Steel Comp 630 Spindle Or Steel Comp 632 Spindle   |
| <b>Material Document And Classification:</b>          | Ams 5643 Assn Std 1st Material Response Shank Or Ams 5657 Assn Std 2nd Material Response Shank     |
| <b>Material Document And Classification:</b>          | Ams 5643 Assn Std 1st Material Response Spindle Or Ams 5657 Assn Std 2nd Material Response Spindle |
| <b>Surface Treatment:</b>                             | Passivate Shank  |
| <b>Surface Treatment:</b>                             | Passivate Spindle  |
| <b>Surface Treatment Document And Classification:</b> | Qq-p-35 Fed Spec Single Treatment Response Shank   |
| <b>Surface Treatment Document And Classification:</b> | Qq-p-35 Fed Spec Single Treatment Response Spindle   |
| <b>Style Designator:</b>                              | L Handle   |

## How to Order

Order this quick release pin from our inventory online by visiting <https://military-fasteners.com/pins/quick+release+pins/MS17986C418> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.