

Description



Fastener Length: 1/8", Thread: 4-40, Head Width: 3/64", Thread Length: 1/8

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS180631
Minimum Qty (MOQ):	10
NSN:	5305-00-926-5637
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

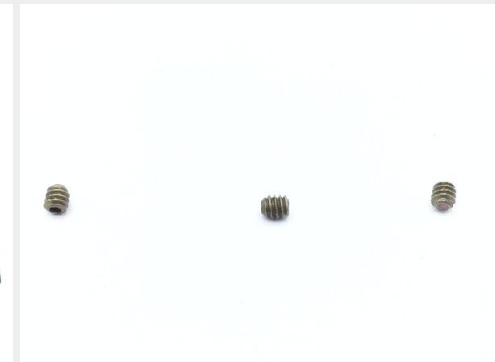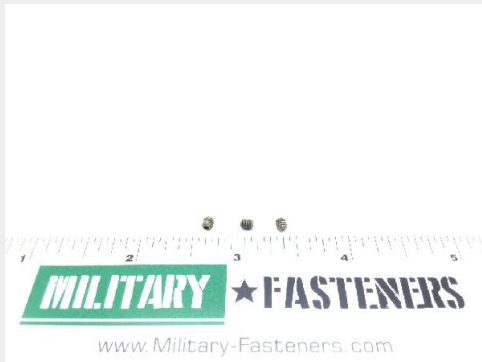

* See page 2 for technical characteristics

P/N MS18063-1 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.125 Inches Maximum
Fastener Length:	0.125 Inches Nominal
Head Style:	Headless (setscrew)
Locking Feature:	Patch Threads Or Pellet Threads Or Strip Threads
Point Style:	Cup
Internal Drive Style:	Hexagon
Nominal Thread Diameter:	0.112 Inches
Width Across Flats:	0.050 Inches Minimum And 0.051 Inches Maximum
Thread Quantity Per Inch:	40
Hardness Rating:	33.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall
Material:	Steel Comp 4037 Overall Or Steel Comp 4137 Overall Or Steel Comp 4140 Overall Or Steel Comp 8630 Overall Or Steel Comp 8740 Overall
Material Document And Classification:	66 Fed Std All Material Responses Overall
Surface Treatment:	Cadmium Overall And Chromate Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416, Type 2, Class 3 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unc
Nondefinitive Spec/std Data:	1 Type And 4 Style

How to Order

Order this setscrew from our inventory online by visiting <https://military-fasteners.com/screws/setscrews/MS18063-1> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.